



WATERPROOF
RELIABLE MOISTURE BARRIERS

ALX™ Interior **Custom Finish**


Description

The ALX™ Interior System is a series of polymer modified cementitious coatings that are bonded to plywood, with a variety of optional finishes and sealers. ALX™ Interior is a decorative topping designed to resurface plain plywood subfloor into a decorative, durable, water resistant, concrete like finish.

Uses

The ALX™ Interior System can be used on residential as well as commercial floors. ALX™ Interior is perfect for use in living areas, lobbies, offices, restaurants and hotels or wherever a thin, decorative and durable floor finish is desired over plywood.

System Overview

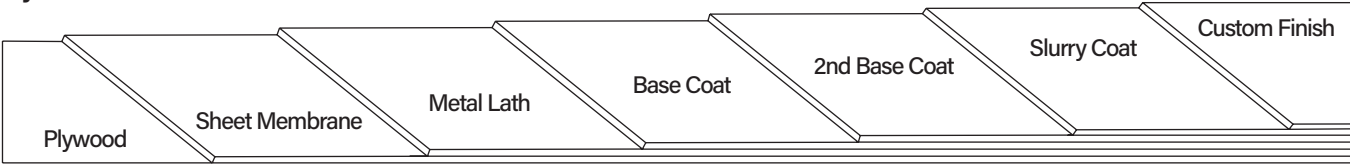

System Data							
Coverages	Base Coat 40 ft ² per batch	2nd Base Coat 150 ft ² per batch	Slurry Coat 200-250 ft ² per batch	Finish Coat 250-350 ft ² per batch	WB Stain 150-400 ft ² per gallon	EC-32 Sealer 200-500 ft ² per gallon	SC-66 Sealer 400-800 ft ² per gallon
Components	<u>WP-25 Metal Lath</u>			Shelf Life			
	<u>WP-10 Staples</u>			N/A			
	<u>WP-40 Sheet Membrane</u>			1 year			
	<u>WP-82 Low Odor Cement Modifier</u>			2 years			
	<u>TC-1 Basecoat Cement</u>			1 year			
	<u>TC-2 Smooth Texture Cement</u>			1 year			
	<u>TC-4 Fine Texture Cement</u>			1 year			
	<u>TC-40 Liquid Colorant</u>			1 year			
	<u>SC-35 Water-Based Stain</u>			3 years			
	<u>EC-32 Clear Epoxy Topcoat</u>			2 years			
	<u>SC-66 WB Satin Polyurethane Sealer</u>			1 year			
	<p>Note: System components may vary, depending on desired result. See "Optional Materials" at the end of this sheet.</p>						

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

WP

WATERPROOF
RELIABLE MOISTURE BARRIERS

ALX™ Interior

Custom Finish

Advantages

Cost-effective • Minimal Downtime • Low Maintenance • Long Lasting • Optional Skid Resistance
• Unlimited Color Variations • Patterns • Can be Installed Solvent Free and low VOC • Typically under ¼ inch thick • May contribute to LEED credits

Inspection

For installation of the ALX™ Interior system, plywood must be minimum ¾ inch CDX or exterior grade. The plywood substrate shall be tongue and groove, properly blocked and nailed (glued and screwed is best). Plywood shall have a maximum joist span of 16 inches. Deflection should be less than L/360. OSB is not a suitable substrate for this material.

Preparation

Be sure the surface is clean, dry and free of grease, paint, oil, dust or any foreign material that may prevent proper adhesion. Do not apply to wet plywood.

Sheet Membrane

Westcoat requires the installation of 6 inch WP-40 Sheet Membrane to all plywood seams for reinforcement. WP-40 can be installed to the entire floor when maximum protection is required. See Sheet Membrane Product Specification Sheet.

Metal Lath

Place the WP-25 Metal Lath on the plywood and cut it to fit the area, making sure the edge of the lath is offset two inches from any parallel plywood seams. The lath should run across the grain of the plywood (across the long seams) when possible. The lath has a grain and it should be placed so that it curves down at the edge of the floor. The lath should be butted at the wall. With the lath in place, start in the center working your way out, stapling the lath using 16-20 staples per square foot (minimum 1 inch crown x 5/8 inch long, 16-gauge non-corrosive Senco P10). Overlap the lath 1-2 inches and staple every 1-2 inches along the seam. With a hammer, pound down any seams or staples that are higher than the lath.

Base Coats

For a base coat over the metal lath, pour 1 gallon of WP-82 Cement Modifier and add up to two quarts of water in a clean mixing bucket and add 1 bag of TC-1 Basecoat Cement. Mix until uniform with a mechanical mixer at a low rpm. Pour the mixture (4½ gallons total) onto the lath and with trowel on edge, smooth to the top of the lath at the rate of 40 square feet per batch. Use a paintbrush to spread the base coat on the edges, ensuring the mixture coats all corners.


A second coat must be applied by combining one gallon of WP-82 Cement Modifier and up to ½ gallon of water with one bag of TC-1 Basecoat Cement. Mix until uniform with a mechanical mixer at a low rpm. Trowel over the first basecoat at a rate of 150 square feet per batch. As soon as it is dry, usually 2 to 3 hours at 70 degrees, scrape off any high spots or ridges that may prevent a smooth slurry coat.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 5
ALX™ Interior 8/18

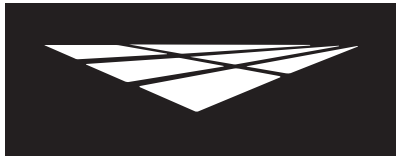

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

WP

WATERPROOF
RELIABLE MOISTURE BARRIERS

ALX™ Interior

Custom Finish

Slurry Coat

Create the slurry coat by combining 1 gallon of WP-82 Cement Modifier and up to ½ gallon of water in a clean mixing bucket then add 1 bag of TC-2 Smooth Texture Cement or TC-4 Fine Texture Cement. Mix until uniform with a mechanical mixer at a low rpm. Trowel the slurry mix over the surface to achieve a smooth finish. Apply the slurry coat, continuously keeping a “wet edge” and blend each new mix into the prior mix. After surface is dry, scrape or grind off any ridges or trowel marks. Coverage of the slurry coat is approximately 200 to 250 square feet per batch. You may sand before and after coats. A second slurry coat may be applied to create a more uniform surface.

Finish Coats

Combine one bag of TC-4 Fine Texture Cement with one gallon of WP-82 Cement Modifier and mix thoroughly with a mechanical mixer at a low rpm. Add ¾ to 1 gallon of water to achieve the desired consistency. Trowel the TC-4 as smooth or textured as desired. After the TC-4 has dried, lightly sand the surface with 120 grit or finer sand paper or sanding screen, to remove all trowel marks, if desired. Vacuum the entire area to remove all dust. Apply a second coat of TC-4 following the directions above. Coverage of the Finish Coat is approximately 250 to 350 square feet per batch.

WB Stain

Apply SC-35 using a pump sprayer, airless sprayer, HVLP sprayer, brush or broom. For a mottled effect, use water to pre-dampen the surface before or in conjunction with the stain. Multiple colors and various amounts of water may be applied at the same time for a variegated finish. SC-35 can be applied in multiple coats to achieve a solid color. Water-Based Stain can be thinned using water, up to equal parts. Thinning will affect the depth of color and may require extra coats.

The coverage will vary depending on the surface. Up to 400 square feet per gallon on a smooth surface and between 150-250 square feet on rough surfaces. Product performs best if applied in thin, even coats. When temperatures are above 80 degrees, it may be necessary to dampen the surface prior to application to prevent material from drying instantly.

Sealers

Mix 2 parts A and 1 part B (by volume) of EC-32 Clear Epoxy Topcoat. Mix completely for 4-5 minutes and immediately get the mix onto the floor. Apply EC-32 with a ⅜ inch, non-shedding, nap roller at 200-500 square feet per gallon. Coverage will vary greatly, depending on desired build. Do not allow material to sit in the mixing bucket. After the EC-32 has dried in about 8-10 hours, you may sand or scrape rough spots and apply a coat of SC-66 Water-Based Satin Polyurethane Sealer, for a low VOC, satin finish sealer (If the SC-66 can't be applied within 24 hours of the EC-32 application, then the EC-32 must be sanded and wiped with acetone, prior to application of the SC-66).

For SC-66 application, pre-mix each component separately. In a clean bucket, mix 2 parts A with 1 part B (by volume) of SC-66 Water-Based Satin Polyurethane Sealer. Mix thoroughly with a low speed (200-300 rpm) drill motor for 4-5 minutes. Make sure to scrape the sides and bottom of the container during mixing. For best results, thin the SC-66 with up to 30% water and apply at approximately 400-800 square feet per gallon. Spray the SC-66 evenly onto the surface with a Chapin type sprayer and backroll. Be sure to apply thin and even by rolling carefully in both directions, being sure not to leave roller marks. To cure properly, do not allow product to puddle. An optional second coat may be applied to ensure even coverage.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 5
ALX™ Interior 8/18



westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

WP

WATERPROOF
RELIABLE MOISTURE BARRIERS

ALX™ Interior

Custom Finish

Optional Materials

Cement Options

- TC-0 may be used in place of the second finish coat of TC-4, for an ultra smooth micro-topping.
- TC-2 may be used in place of the TC-4 as a finish coat, for a one coat system with a slightly more aggressive texture.
- WP-81 may be used in place of WP-82, when low order is not necessary.
- TC-40 Liquid Colorant may be added to integrally color the cement in the finish coat.

Coloring Options

- For an optional method, use Westcoat SC-30 Acid Stain. Please read Product Specification Sheet prior to use.

Sealer Options

- EC-95 Polyurethane Topcoat or EC-96 Satin Polyurethane Topcoat may be installed over the EC-32 for the ultimate high build, mar and chemical resistant finish, where odor is not an issue.
- SC-65 WB Gloss Polyurethane Sealer can be applied over the EC-32 for a low odor, solvent free, mar and chemical resistant sealer.
- SC-67 WB Semi-Gloss Polyurethane Sealer can be applied over the EC-32 for a low odor, solvent free, mar and chemical resistant sealer.
- EC-101 Polyaspartic 100% Solids may be used in lieu of the EC-32 as a high gloss, quick dry, high build, mar and chemical resistant finish.

Skid Resistance

- CA-30 Safe Grip can be added to the final coat of sealer for added skid resistance.

* Please refer to Product and System Specification Sheets for additional information.

Clean Up

Uncured material can be removed with soap and warm water or an environmentally-safe solvent. If cured, material can only be removed mechanically or with an environmentally-safe solvent.

Maintenance

Interior floors can be dust mopped daily or mopped using a low PH cleaner. For more information on floor care and maintenance, please refer to the General Maintenance sheet.

The ALX™ Interior System should be inspected for wear every 2 to 4 years. The system should be resealed with the appropriate Westcoat clear sealer every 3 to 5 years, depending upon traffic and UV exposure. Contact the original Installer of Westcoat for complete re-coating instructions.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Cements contain silicas, dust mask or respirator should be used when mixing, sanding or grinding.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

4 of 5
ALX™ Interior 8/18



westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

WP

WATERPROOF
RELIABLE MOISTURE BARRIERS

ALX™ Interior

Custom Finish

Limitations

- This system is designed for professional use only.
- Read Product Specification Sheets for every product you will be using before beginning the project.
- Do not apply at temperatures below 50°F or above 90°F.
- Sealers will make the surface slippery, please be aware the texture of the surface and how the sealer will affect the look, feel and skid resistance.
- Approval and verification of proposed colors, textures and slip resistance is recommended.
- Use dustless equipment when possible.
- Light wheel and foot traffic only.
- Do not allow Westcoat products to freeze.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

5 of 5
ALX™ Interior 8/18