

westcoat[®]

PRODUCT SPECIFICATION

CA

ACCESSORIES
ADDITIVES & ACCESSORIES

CA-10 Acrylic Topcoat Color Pack

Description

Westcoat's CA-10 Acrylic Topcoat Color Pack is an acrylic pigment that is designed to be mixed into Westcoat SC-10 Acrylic Topcoat Bases.

Uses

CA-10 is the pigment pack designed to be added to select SC-10 bases and together makes the acrylic topcoat that is used to seal many Westcoat systems, such as: ALX Pro, MACoat and Texture-Crete.

Advantages

Allows Tinting of SC-10 Acrylic Topcoat on Site • 10 Available Colors • Convenient Packaging • Easy to Ship

Product Data			
Packaging	15 fl. oz. container (14 units per case)	Colors	Anchor Gray, Arizona Tan, Cape Cod Gray, Concrete Gray, Deep Tan, Omaha Tan, Rocky Nook, Spanish Brown, Stone Gray, Travatan
Coverages	N/A	Mix Ratio	1 container per 5 gal pail of SC-10 Base
VOC Content	<100 gm/l	Shelf Life	1 year in unopened packaging

Inspection

Please refer to the desired System Specification Sheet for further information regarding Inspection. Substrate must be clean, dry, and free of grease, paint, oil, dust, curing agents, or any foreign material that will prevent proper adhesion. Over previously coated systems, surface must be structurally sound with no peeling or flaking. Over sheet metal, metal should be bonderized, clean and free of rust. If galvanized metal is used, it must be free of oil and abraded.

Moisture

All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), contact the manufacturer before application.

Preparation

Please refer to the desired System Specification Sheet for further information regarding Preparation.


DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

1 of 3
CA-10 11/24

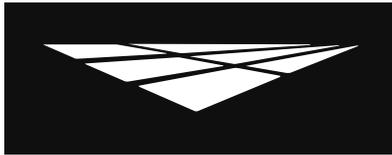

westcoat[®]

**PRODUCT
SPECIFICATION**

CA

ACCESSORIES
ADDITIVES & ACCESSORIES

CA-10 Acrylic Topcoat Color Pack

Mixing

Premix CA-10 prior to adding to corresponding SC-10 Base. Ensure the correct base is being used prior to mixing (see required SC-10 Base chart below). Add 1 unit of CA-10 per five gal pail of SC-10 Base. Scrape the sides of container to get entire contents of CA-10 into the SC-10 base. Use a mechanical mixer at a slow speed. Combine the CA-10 and SC-10 base until a homogeneous mixture and color is obtained, typically 2-3 minutes. For color consistency, box all material to be used on the same project.

Coverage

Will vary depending on the surface. Up to 400 square feet per gallon on a smooth surface and between 125-300 square feet per gallon on a rough surface. Please refer to the SC-10 Acrylic Topcoat Product Specification Sheet for further information regarding Coverage.

Application

Please refer to the SC-10 Acrylic Topcoat Product Specification Sheet for further information regarding Coverage..

Dry Time

For best results, allow SC-10 4-6 hours drying time at 72F degrees before permitting light pedestrian traffic or additional coats are applied. Allow 24 hours to cure before heavy traffic is permitted. Allow 48 hours before heavy objects are placed on the surface and allow 72 hours for vehicular traffic. Allow 5 days prior to any abrasion or chemical exposure.

Clean Up

Uncured material should be removed with an environmentally-safe solvent. Cured material should be removed mechanically.

Limitations

- This product is designed for professional use only.
- Do not apply at temperatures below 50°F or above 90°F. Hot or cold weather may affect dry times.
- Be sure to do adequate surface preparation.
- Do an adhesion test if not applied as part of the standard systems.
- Rain will wash away uncured acrylic products. If inclement weather threatens, cover deck to protect new application.
- Skid resistant additives are available.
- Do not apply if rain is forecast within 48 hours or heavy dew within 24 hours.
- Do not allow any Westcoat products to freeze.
- Material should be boxed for multiple units and batches to ensure color uniformity.


DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 3
CA-10 11/24

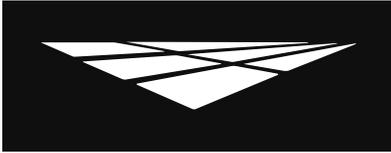

westcoat[®]

**PRODUCT
SPECIFICATION**

CA

ACCESSORIES
ADDITIVES & ACCESSORIES

CA-10 Acrylic Topcoat Color Pack

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Be careful not to get on skin, clothes or in eyes. Gloves and respirators are strongly recommended. Avoid breathing vapors. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

Required SC-10 Base Chart

CA-10 Acrylic Topcoat Color	Required SC-10 Base
Anchor Gray	Mid Base
Arizona Tan	White Base
Cape Cod Gray	White Base
Concrete Gray	White Base
Deep Tan	White Base
Omaha Tan	White Base
Rocky Nook	Mid Base
Spanish Brown	Mid Base
Stone Gray	Mid Base
Travatan	White Base

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 3
CA-10 11/24