

westcoat

PRODUCT SPECIFICATION

CA

ACCESSORIES
ADDITIVES & ACCESSORIES

CA-24 Temper-Crete™ Accelerator

Description

Westcoat's CA-24 Temper-Crete™ Accelerator is a drop-in additive that will help speed up the drying times of Westcoat's EC-24 Temper-Crete™ Urethane.

Uses

CA-24 Temper-Crete™ Accelerator can be used in the Temper-Crete™ SL, SLB, SLC, SLQ, RT, RTB, RTC and RTQ Systems to help speed up the drying time of the Primer and Temper-Crete™ Coat applications.

Advantages

Easy to Use • Can Be Used in Primer and Self-Leveling Applications • Reduces Dry Times

Product Data			
Packaging	4 oz bottle (filled with 2 fl oz)	Colors	Clear
Coverages	N/A	Mix Ratio	Up to 1 oz per 246 oz kit of EC-24
VOC Content	<100 gm/l	Shelf Life	2 years in unopened packaging

Inspection

Please refer to the desired System Specification Sheet for further information regarding inspection.

Preparation

Please refer to the desired System Specification Sheet for further information regarding Surface Preparation.

Mixing

All materials should be conditioned at 60-75F degrees for a minimum of 24 hours before use. Up to 1 fluid ounce of CA-24 can be added per kit of EC-24. When using CA-24, combine EC-24 Parts A & B and mix for 30 seconds, then add the desired amount of CA-24 and mix for another 30 seconds, prior to adding the Part C (cement).

Application


Note: CA-24 is designed for use when temperatures are between 45F-65F degrees. When CA-24 is added to EC-24 it will speed up dry times, but also reduces the working time. Do not add more than 1 fluid ounce per kit of EC-24. Prior to use, it is recommended to perform a mock up to verify desired results, prior to proceeding with the project. For more information on product application, please refer to the appropriate System Specification Sheet. CA-24 will reduce the working time of the Temper-Crete Coat.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

1 of 2
CA-24 7/25

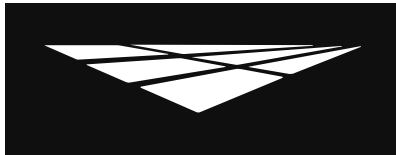

westcoat®

**PRODUCT
SPECIFICATION**

CA

ACCESSORIES
ADDITIVES & ACCESSORIES

CA-24 Temper-Crete™ Accelerator

Dry Time

Below is the approximate "tack free" dry times when CA-24 is added to the EC-24 mix for the Temper-Crete™ Coat.

~21 hrs (45F degrees and 50% humidity)

Clean Up

Uncured material can be removed with an environmentally-safe solvent. If cured, material can only be removed mechanically.

Limitations

- CA-24 will decrease working time considerably. This may be exacerbated if multiple mixes are made at the same time.
- Do not use more than 1 oz per mixed 246 oz kit of EC-24 Temper-Crete™.
- Do not allow any Westcoat products to freeze.
- CA-24 is suitable for use in applications where substrate and environmental temperatures are between 45F-65F degrees. Do not use CA-24 if temperatures exceed 65F degrees.
- When using CA-24, you should still precondition the Temper-Crete™ materials (EC-24, TC-24, TC-75, etc)
- All dry times are based on normal traffic. When using spiked shoes, additional dry times may be needed to prevent indentation of the Temper-Crete™ Coat.
- CA-24 is not intended to be added to EC-28.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat, and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat®

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2
CA-24 7/25