




Description

Westcoat's Fast Stain Grind & Seal System is a process of grinding the concrete and applying Westcoat's acetone dye and sealer. There are no acidic ingredients used and the stain is low in VOC making it a more environmentally friendly system.

Uses

The Fast Stain Grind & Seal System is designed for interior applications and is applied directly to the existing concrete. It is a perfect way to color plain or old concrete in showrooms, salons, restaurants and offices, as well as residential and commercial concrete floors. Recommended for use on medium to heavy foot traffic interior floors. The standard sealer in this system is EC-11, which is suitable for light and medium duty traffic areas. Alternative sealer options EC-32 and SC-65 are suitable for medium duty traffic areas. For medium to heavy duty traffic areas, EC-95G or EC-95F may be used in lieu of EC-11.

System Overview

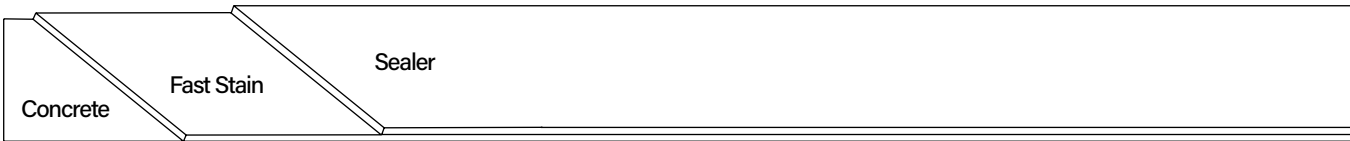

System Data		
Coverages	Fast Stain 150-400 ft ² per gallon	Sealer 300-600 ft ² per gallon
Components	SC-36 Fast Stain EC-11 WB Epoxy Topcoat	Shelf Life 5 years 3 years

Advantages

- Low VOC
- Medium to High Durability
- Renews Old Concrete
- Low or High Gloss Sealers
- Easy to Use
- 12 Standard Colors
- Colors Can Be Blended
- No Rinsing Needed
- May Contribute to LEED Credits

Inspection

Concrete must be clean, dry and free of grease, paint, oil, dust, curing agents, laitance or any foreign material that will prevent proper adhesion. The concrete should be at least 2,500 PSI, porous and able to absorb water. A minimum of 28 days curing time is required on all concrete. Prior to starting work, test existing concrete slab for efflorescence, moisture and hydrostatic pressure.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

SC

SURFACE COAT
PROTECTIVE SEALERS & STAINS

Fast Stain

Grind & Seal

Concrete Patch

Before or after grinding, the concrete can be patched with TC-29 Concrete Patch. In a clean, dry bucket add four parts TC-29 Concrete Patch to one and a half parts water (by Volume) or a ten pound bag to 40-50 ounces of water, depending on the desired consistency. Mix thoroughly for 1-2 minutes with a low rpm drill. Allow 2-4 hours at 72 degrees before grinding. Cracks, spalls, holes and pits should be overfilled and allowed to dry properly. This remedial approach to patch cracks is not guaranteed and it should be noted that when the substrate moves, the crack may reappear. Repaired areas will be visible.

Moisture

All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), contact the manufacturer before application.

Concrete Repair

For concrete that needs repairs beyond just dormant cracks, TC-23 Mortar Mix can be used. TC-23 is designed to be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material under most Westcoat systems. Please refer to the TC-23 Mortar Mix Product Specification Sheet for details.

Preparation

Prepare surface by diamond grinding with 60-80 grit tools to achieve a clean, uniform, porous surface that will allow the Fast Stain to soak in and react with the cement in the concrete. Sweep and vacuum surface entirely. Any dust or contaminants will deter adhesion.

Applying Product

For ease of mixing, begin by adding a small amount of acetone into the SC-36 Fast Stain powder container. Pour approximately 6 ounces of acetone into the half pint container of pre-measured Fast Stain powder (1 gallon mix) or 12 ounces of acetone into the pint container of pre-measured Fast Stain powder (5 gallon mix). Replace the lid and shake to dissolve the powder. Once powder has dissolved, place a funnel in the opening of the 1 or 5 gallon acetone and pour contents of first mix into remaining acetone. Shake entire mixture and let sit for 15 minutes, shake again and the Fast Stain is now ready to apply. Colors may be varied by adding more or less acetone.

Material may be applied with a solvent safe sprayer. Additional coats will produce a darker color. Multiple colors may be layered or sprayed at the same time to create a variegated finish. Be sure to paper off any areas that you do not want stained.

The coverage will vary depending on the surface. Up to 400 square feet per gallon on a smooth surface and between 150-250 square feet on rough surfaces.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 4
Fast Stain Grind & Seal 12/20



westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

SC

SURFACE COAT
PROTECTIVE SEALERS & STAINS

Fast Stain

Grind & Seal

Sealer

Mix EC-11 (2 parts A with 1 part B together) thoroughly, in a clean bucket. Mix slowly for at least 3-5 minutes and until completely combined. Only prepare the amount that you can use in 4 hours. You may thin up to 50% with water. EC-11 can be applied by rolling or spraying and backrolling with a $\frac{3}{8}$ inch nap, non-shedding roller cover at a rate of 300-600 square feet per gallon.

For added slip resistance, add up to 1 quart of CA-30 Safe Grip per 3 gallons of sealer. #30 silica sand may be broadcast when extra traction is needed. Quantities may vary.

Sealer Dry Time

When using EC-11, allow 1-4 hours between coats and 12-24 hours before light foot traffic. Normal traffic may be permitted after 24-48 hours. For vehicle traffic, allow 7 days. Allow 72 hours before placing heavy objects on the surface.

Clean Up

Uncured material can be removed with soap and warm water. If cured, material can only be removed mechanically.

Optional Materials

Concrete Patch

- TC-29 Concrete Patch can be used to fill cracks, spalls, holes and pits.

Cement Options

- TC-23 Mortar Mix may be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material.

Sealer Options

- SC-65G WB Gloss Polyurethane Sealer, SC-65F WB Flat Polyurethane Sealer and SC-65SG WB Semi-Gloss Polyurethane Sealer can be used for a low odor, solvent free, mar and chemical resistant sealer.
- EC-32 Clear Epoxy Topcoat can be used in lieu of EC-11 when a 100% solids epoxy topcoat is required.
- EC-95G Gloss Polyurethane Topcoat can be used in lieu of EC-11 when a solvent-based polyurethane is required.
- EC-95F Flat Polyurethane Topcoat can be used over EC-95G Gloss when a low gloss, solvent-based polyurethane topcoat is required.

Skid Resistance

- CA-29 Mini Safe Grip, CA-30 Small Safe Grip or CA-31 Large Safe Grip can be added to the final coat of sealer for added skid resistance.
- CA-33 Aluminum Oxide can be used for skid resistance in heavy traffic areas.


* Please read Product Specification Sheets on these products prior to use. SC-65F WB Flat Polyurethane Sealer has a likelihood of turning white when applied directly over a substrate with moisture. Do not apply over an unsealed surface.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 4
Fast Stain Grind & Seal 12/20

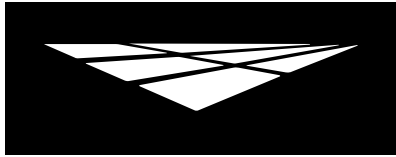

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

SC

SURFACE COAT
PROTECTIVE SEALERS & STAINS

Fast Stain

Grind & Seal

Maintenance

Interior Floors can be dust mopped daily or mopped using a neutral pH cleaner. For more information on floor care and maintenance, please refer to the General Maintenance sheet.

The Fast Stain System should be inspected for wear every 2 to 4 years. The system should be resealed with the appropriate Westcoat clear sealer every 3 to 5 years, depending upon traffic and UV exposure. Contact the original Installer of Westcoat for complete re-coating instructions.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation.

Be sure to extinguish all pilot lights and sources of ignition and ventilate the area prior to starting the job. Acetone fumes are **EXTREMELY FLAMMABLE**.

Limitations

- This system is designed for professional use only.
- Read Product Specification Sheets for every product you will be using before beginning the project.
- Do not apply at temperatures below 50°F or above 90°F.
- For interior use only.
- Be sure to paper off any areas that you do not want stained.
- Will not hide imperfections or stains in concrete.
- Product will stain concrete and can produce a mottled look. Colors and effects will vary.
- Fast Stain will fade with prolonged exposure to sunlight.
- Sealers will make the surface slippery, please be aware of the existing texture of the concrete and how the sealer will affect the look and feel.
- Approval and verification of proposed colors, textures and slip resistance is recommended.
- Do not allow Westcoat products to freeze.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

4 of 4
Fast Stain Grind & Seal 12/20