




Description

The Nano Stain Grind & Seal System is a process of grinding the concrete and applying Westcoat’s Nano Stain and SC-65 WB Gloss Polyurethane Sealer. Nano Stain is a semi-transparent, decorative concrete stain. Nano technology allows for deeper penetration into concrete substrates. SC-37 allows for an easy, one-step application to safely stain. There are no caustic ingredients and unlike acid stain, there is no need for neutralizing or rinsing and the stain is low in VOC, making it a more environmentally friendly system. The stain is then sealed for protection.

Uses

The Nano Stain Grind & Seal System is designed to create a stained effect on existing concrete floors with high to low gloss sealer options. This system is used primarily on interior projects including showrooms, restaurants, cafes, breweries, wineries, offices and hotels. This is a light duty system, designed for residential interior floors with light foot traffic.

System Overview

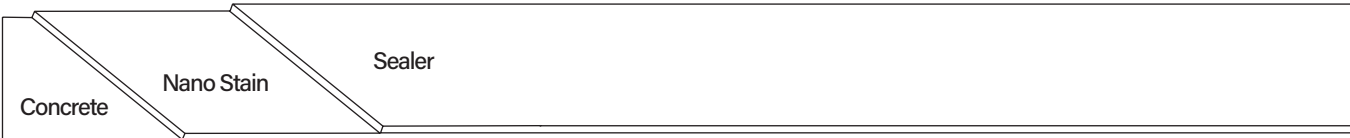

System Data		
Coverages	Nano Stain 400-800 ft ² per gallon	Sealer 600-800 ft ² per gallon
Components	<u>SC-37 Nano Stain</u> <u>SC-65 WB Gloss Polyurethane Sealer</u>	Shelf Life 3 years 1 year

Advantages

Water-Based ▪ Low Odor ▪ Durable ▪ Deep Penetrating ▪ No Rinsing Needed ▪ Easy to Use ▪ Colors Can be Blended ▪ Can Be Sealed With Both Solvent and Water-Based Sealers ▪ Can Be Applied Over Many Other Acrylics ▪ Low or High Gloss Sealers

Inspection

Concrete must be clean, dry and free of grease, paint, oil, dust, curing agents, laitance or any foreign material that will prevent proper adhesion. The concrete should be at least 2,500 PSI, porous and able to absorb water. A minimum of 28 days curing time is required on all concrete. Prior to starting work, test existing concrete slab for efflorescence, moisture and hydrostatic pressure.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

SC

SURFACE COAT
PROTECTIVE SEALERS & STAINS

Nano Stain

Grind & Seal

Concrete Patch

Before or after grinding, the concrete can be patched with TC-29 Concrete Patch. In a clean, dry bucket add four parts TC-29 Concrete Patch to one and a half parts water (by Volume) or a ten pound bag to 40-50 ounces of water, depending on the desired consistency. Mix thoroughly for 1-2 minutes with a low rpm drill. Allow 2-4 hours at 72 degrees before grinding. Cracks, spalls, holes and pits should be overfilled and allowed to dry properly. This remedial approach to patch cracks is not guaranteed and it should be noted that when the substrate moves, the crack may reappear. Repaired areas will be visible.

Moisture

All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), contact the manufacturer before application.

Preparation

Prepare surface by diamond grinding with 60-80 grit tools to achieve a clean, uniform, porous surface that is able to absorb water. Prior to starting work, test existing concrete slab for efflorescence, moisture and hydrostatic pressure. Vacuum surface entirely and ensure that any dust or contaminants are removed, as these will deter adhesion.

Applying Product

SC-37 Nano Stain can be thinned using water as needed. Thinning will effect the depth and intensity of the color. For general use, thinning and applying multiple coats is recommended. A test panel or mock-up should be performed, prior to the application. If different batches or more than one container of SC-37 are to be used, all material should be boxed or mixed together prior to application. All material should be shaken before use and should be shaken periodically during use. Nano Stain can be strained or filtered before application, if needed. SC-37 may be applied using a pump sprayer, airless sprayer, broom or other application methods depending on the desired look. Prior to application, a mock-up should be performed to verify the desired color and effect. Do not apply when temperature is below 50F degrees or above 90F degrees. The surface may be dampened with water before applying the stain. SC-37 should be applied in light applications. A fine mist of stain or water can be applied, should brush or broom marks appear. Different colors may be applied at the same time for a variegated finish. Recoat in ½ to 1 hour at 70F degrees, if needed.

Sealer

Pre-mix each component separately. In a clean bucket, mix 2 parts A with 1 part B (by volume) of SC-65 Water-Based Gloss Polyurethane Sealer. Mix thoroughly with a low speed (200-300 rpm) drill motor for 4-5 minutes. Make sure to scrape the sides and bottom of the container during mixing. For best results, thin the SC-65 with up to 30% water and apply at approximately 600-800 square feet per gallon. Spray the SC-65 evenly onto the surface with a Chapin type sprayer and backroll. Be sure to apply thin and even by rolling carefully in both directions, being sure not to leave roller marks. To cure properly, do not allow product to puddle. Avoid application if the surface is above 80 degrees.


DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 4

Nano Stain Grind & Seal 11/18

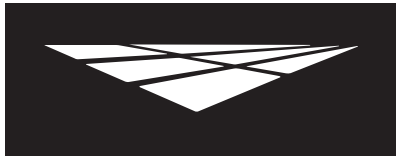

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

SC

SURFACE COAT
PROTECTIVE SEALERS & STAINS

Nano Stain

Grind & Seal

Sealer Dry Time

Allow 12-18 hours at 70 degrees between coats and 24 hours before light foot traffic. Normal foot traffic may be permitted after 48 hours. For vehicular traffic, allow a minimum of 72 hours. See Individual Product Specification Sheet on each sealer for accurate dry times.

Clean Up

Uncured material can be removed with soap and warm water. If cured, material can only be removed mechanically.

Optional Materials

Concrete Patch

- TC-29 Concrete Patch can be used to fill cracks, spalls, holes and pits.

Sealer Options

- SC-67 WB Semi-Gloss Polyurethane Sealer can be used for a low odor, solvent free, chemical, UV and mar resistant finish.

Skid Resistance

- CA-30 Small Safe Grip or CA-31 Large Safe Grip can be added to the final coat of sealer for added skid resistance.

* Please read Product Specification Sheets on these products prior to use.

Maintenance

Interior Floors can be dust mopped daily or mopped using a low pH cleaner. For more information on floor care & maintenance, please refer to the General Maintenance sheet.

The Nano Stain System should be inspected for wear every 2 to 4 years. The system should be resealed with the appropriate Westcoat clear sealer every 3 to 5 years depending upon traffic and UV exposure. Contact the original Installer of Westcoat for complete re-coating instructions.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 4
Nano Stain Grind & Seal 11/18



westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

SC

SURFACE COAT
PROTECTIVE SEALERS & STAINS

Nano Stain

Grind & Seal

Limitations

- This system is designed for professional use only.
- Read Product Specification Sheets for every product you will be using before beginning the project.
- Do not apply at temperatures below 50°F or above 90°F.
- Be sure to paper off any areas that you do not want stained.
- Will not hide imperfections or stains in concrete.
- Nano Stain will stain concrete and can produce a mottled look. Colors and effects will vary.
- SC-37 is designed to resist fading, especially when sealed, but no material is fade-proof when subjected to ultraviolet rays and the elements. Westcoat cannot guarantee any color or material from fading, when exposed to ultraviolet rays.
- Sealers will make the surface slippery, please be aware of the existing texture of the concrete and how the sealer will affect the look and feel.
- Approval and verification of proposed colors, textures and slip resistance is recommended.
- Do not allow Westcoat products to freeze.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

4 of 4
Nano Stain Grind & Seal 11/18