

		westcoat®	PRODUCT SPECIFICATION
TC	TEXTURE COAT <small>DECORATIVE TEXTURED SURFACES</small>	TC-71 Slurry Filler	

Description

TC-71 Slurry Filler is a proprietary blend of sands when mixed with a 100% solids epoxy, provides a high-build system that is tough, chemical resistant, low odor and durable.

Uses

TC-71 is used in the Westcoat Epoxy Slurry System. It is used to create seamless floors in manufacturing plants, mechanical rooms, warehouses, commercial kitchens, restaurants, garages and service areas. The Epoxy Slurry System is designed to be used as a medium duty coating.

Advantages

• Pre-Blended Mix of Proprietary Sands • High Build • High Strength

Product Data			
Packaging	50 lb Bag	Color	N/A
Coverages	~24 ft ² - 96 ft ² depending on thickness	Mix Ratio	1.5 gal of Epoxy to 1.5 gal of TC-71
VOC Content	Zero VOC	Shelf Life	5 Years in unopened packaging

Inspection

Please refer to the desired System Specification Sheet for further information regarding inspection.

Preparation

Please refer to the desired System Specification Sheet for further information regarding Surface Preparation.

Moisture

All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), please refer to the EC-15 Moisture Vapor Barrier Product Specification Sheet.


Mixing

Please refer to the desired System Specification Sheet for further information regarding Mixing.

Applying Product

Please refer to the desired System Specification Sheet for information regarding Application.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

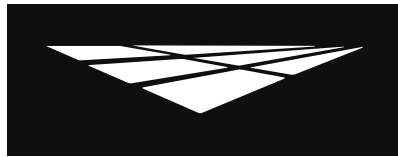

westcoat®

**PRODUCT
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

TC-71 Slurry Filler

Dry Time

Please refer to the desired System Specification Sheet for information regarding Dry Time.

Clean Up

Uncured material can be removed with an environmentally-safe solvent. If cured, material can only be removed mechanically.

Limitations

- This product is designed for professional use only.
- Read System Specification Sheets before beginning the project.
- For interior use only.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Contains portland cement. Use the proper personal protective equipment. Avoid eye contact and prolonged contact with skin. Wash thoroughly after handling. If eye contact occurs, flush with water for 15 minutes. Call a physician immediately.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat®

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2
TC-71 5/25