



westcoat
SPECIALTY COATING SYSTEMS

Texture-Crete®

Resurface and beautify existing concrete with Texture-Crete, a series of polymer modified cementitious coatings designed to resurface concrete. Texture-Crete transforms plain concrete into a durable smooth or textured finish. Easily simulate tile, flagstone, slate, and more with a wide variety of protective Westcoat finishes in gloss, satin or a natural look.



TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES



westcoat

Add texture. Add dimension.
Our Texture Coat product line transforms plain concrete into decorative, durable, textured works of art. Texture Coat's finishes work equally well on old or new concrete and are perfect for simulating the look of flagstone, slate, stone, pavers, tile, or create a look all your own.

westcoat
SPECIALTY COATING SYSTEMS

770 Gateway Center Drive San Diego, CA 92102
800-250-4519 • Fax 619-262-8606 • westcoat.com

FOR PROFESSIONAL USE ONLY



F O R P R O F E S S I O N A L U S E O N L Y

Versatile

Texture-Crete can be installed in a variety of settings including but not limited to driveways, walkways, patios, courtyards, entryways, showrooms, and pool decks in both commercial and residential environments.

Texture-Crete Standard

Texture-Crete Standard is a series of polymer modified cementitious coatings that is bonded to the concrete with a variety of textures, colors and sealers. Texture-Crete is a decorative topping designed to change plain concrete into a very decorative, durable, and textured finish.

Texture-Crete Custom

Texture-Crete Custom Finish is a series of polymer modified cementitious coatings that is bonded to the concrete with a variety of finishes and sealers. Texture-Crete Custom Finish is a decorative topping made to change plain concrete into a very decorative, durable, textured finish. Various patterns can be simulated from tile to flagstone and more.

Texture-Crete Broom-On

Texture-Crete Broom-On is a polymer modified cementitious coating finished with a highly durable acrylic sealer. Texture-Crete Broom-On is designed to restore old, rough, stained or poorly finished concrete.

TC Slope & Patch

TC Slope & Patch is a mixture of acrylic cement and cement modifier developed to aid in patching, sloping or repairing concrete in conjunction with Texture-Crete. TC Slope can be used for feather patching or sloping projects.

Advantages


- Decorative
- Cost-effective
- Fast drying
- Low maintenance
- Durable
- Available skid-resistant finish
- Optional solvent-free installation
- Variety of textures and patterns
- Applied over existing concrete
- UV resistant options

Texture-Crete Standard




Primer Slurry Knockdown Color and Seal Texture

Texture-Crete Custom

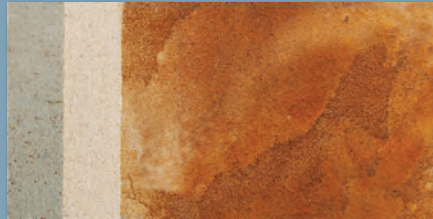

Primer Slurry Skip Trowel Stain and Seal Texture



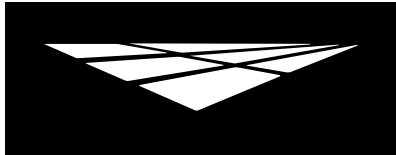

Texture-Crete[®] Custom Finish


Description

Texture-Crete[®] Custom Finish is a series of polymer-modified cementitious coatings that are bonded to the concrete with a variety of optional finishes and sealers. Texture-Crete[®] Custom Finish is a decorative topping designed to change plain concrete into a very decorative, durable and textured finish. Various patterns can be simulated, from tile to flagstone and more.

Uses

Texture-Crete[®] Custom Finish was created to resurface exterior concrete that is aesthetically unattractive. Some uses include driveways, walkways, patios, garage floors, courtyards, entryways, showrooms and pool decks. Texture-Crete[®] Custom Finish can be installed in both the commercial and residential environment.

System Overview

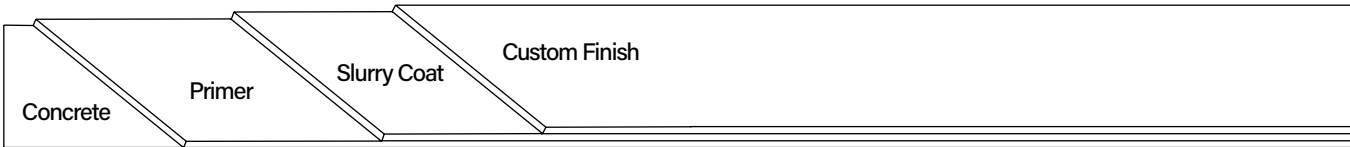


System Data					
Coverages	Primer 250-350 ft ² per gallon	Slurry Coat 150-200 ft ² per batch	Texture Skip Trowel 150-200 ft ² per batch	WB Stain 150-400 ft ² per gallon	Sealer 200-300 ft ² per gallon
Components	WP-47A Seam Tape EC-76 Cove Gel EC-11 Water-Based Epoxy TC-2 Smooth Texture Cement TC-5 Grout Texture Cement WP-81 Cement Modifier TC-40 Liquid Colorant SC-35 Water-Based Stain SC-70 Acrylic Lacquer Sealer		Shelf Life		
			1 year		
			2 years		
			3 years		
			1 year		
			1 year		
			2 years		
			1 year		
			3 years		
			5 years		

Advantages

- Cost Effective
- Fast Drying
- Low Maintenance
- Long Lasting
- Skid Resistant Finish Available
- Unlimited Colors
- Attractive
- Can be Installed Solvent Free
- Variety of Textures and Patterns

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

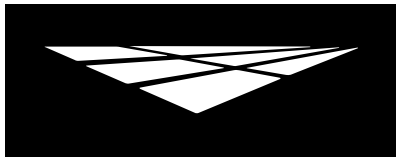

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Texture-Crete[®]

Custom Finish

Inspection

Concrete must be clean, dry and free of grease, paint, oil, dust, curing agents, laitance or any foreign material that will prevent proper adhesion. The concrete should be at least 2,500 PSI, porous and able to absorb water. A minimum of 28 days curing time is required on all concrete. Prior to starting work, test existing concrete slab for efflorescence, moisture and hydrostatic pressure.

Moisture

All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), please refer to the EC-15 Moisture Vapor Barrier Product Specification Sheet.

Preparation

Pre-cut and clean all cracks and joints with a concrete diamond blade to at least ¼ x ¼ inch. Prepare concrete to a profile equal to CSP 3 as specified by ICRI. Methods may vary according to the thickness of the coating to be applied and the condition and hardness of the concrete. Other factors include the forecasted use of the surface and the environment in which it is to be installed. When preparing the surface use caution when shot blasting around pools, scarifying too aggressively, leaving grind marks or grinding too smooth.

Crack Treatment

Fill cracks with EC-76 Cove Gel. WP-47A Seam Tape may also be used to help reinforce, in which case the EC-76 should be placed into the tape and smoothed with a trowel or putty knife. Broadcast fine silica onto the wet epoxy to provide a surface for the Texture-Crete[®] to bond. EC-76 should be allowed to dry completely prior to primer application.

For additional reinforcement, place WP-47H Fiberlath Heavy Duty over the dry EC-76. Mix four gallons of WP-90 Waterproofing Resin with one bag TC-5 Grout Texture Cement and trowel into the WP-47H. This is a remedial approach to patch cracks and there is no guarantee that cracks will not reappear.

Concrete Repair


For concrete that needs repairs beyond just dormant cracks, TC-23 Mortar Mix can be used. TC-23 is designed to be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material under most Westcoat systems. Please refer to the TC-23 Mortar Mix Product Specification Sheet for details.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 6
Texture-Crete[®] Custom 7/21

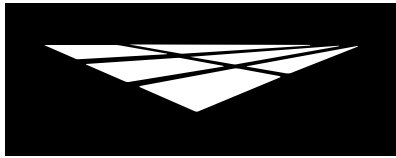

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Texture-Crete[®]

Custom Finish

Free Style Pattern

Another way to deal with cracks is to cut a pattern using a crack chaser. While the slurry is being installed, clean out expansion joints and cracks with a margin trowel. Then simply incorporate a pattern of "fake cracks" along with the existing cracks, which create the look of flagstone by cutting with a crack chaser into any pattern you choose.

Primer

Premix each component separately. In a clean bucket, mix 2 parts A with 1 part B (by volume) of EC-11. Mix thoroughly with a low speed (400-600 rpm) drill motor for 3-4 minutes. Make sure to scrape the sides and bottom of the container during mixing. EC-11 can be thinned with water, up to 50%. After mixing, dip and roll or spray and back roll the EC-11 onto the surface at a rate of 250-350 square feet per gallon. Do not allow material to puddle. Allow EC-11 to become tacky and trowel slurry coat into tacky primer. Do not let the primer dry and shell over, as this may prevent the slurry coat from properly adhering. Alternatively, you can roll the EC-11. Immediately broadcast 30 grit silica sand to refusal and allow the EC-11 to dry (1-4 hours at 70F degrees). Remove all loose sand prior to installing the slurry coat.

Slurry Coat

Pour 1 gallon of WP-81 Cement Modifier and up to ½ gallon of water in a clean mixing bucket and then add the TC-5 Grout Texture Cement and TC-40 Liquid Colorant of choice. Mix thoroughly with a low rpm drill motor. Coverage of the slurry coat is between 150-200 square feet per batch. For best results, allow slurry to dry overnight, prior to pattern installation.

Pattern Installation (Optional)

For a flagstone look, peel the CA-50 Stone Strips and apply to the grout coat in a simulated flagstone pattern. Take time to lay out the pattern and inspect for consistency prior to application of the texture coat. If the pattern is not desirable, remove and apply new Stone Strips.


Tile patterns can be achieved by applying CA-60 Grout Tape in a tile pattern. The tile size and the grout line size can be varied from job to job, to give each installation a custom look. The best way to achieve a straight line is to pre-measure tile size and mark your lines using a chalk box with white chalk. Place your Grout Tape on the outside edge of the chalk line so the chalk line will be covered by the texture.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 6
Texture-Crete[®] Custom 7/21

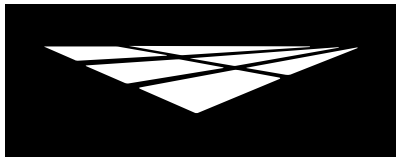

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Texture-Crete[®]

Custom Finish

Texture Skip Trowel

Pour one gallon of WP-81 Cement Modifier in a clean mixing bucket and add one bag of TC-2 Smooth Texture Cement. Mix thoroughly with a low rpm drill motor. Add desired TC-40 Liquid Colorant to the mix. Be sure to carefully rinse the container to remove all the colorant. Add up to ½ gallon of water to achieve the desired consistency. Make sure to use the exact same amount of water and colorant for each mix and combine completely to maintain consistent color and texture.

Pour the mix onto the surface to be textured. Using a skip trowel method, trowel the area with a rounded pool trowel. Wipe the trowel clean with a wet rag as needed. Trowel consistently and continuously, being sure to keep a wet edge. Make sure to trowel the entire surface the same way throughout the project. Coverage of the texture coat is between 150-200 square feet per batch. If you are unsatisfied with the results, scrape off immediately and re-apply.

After the texture has hardened enough to walk on, scrape and/or slightly sand the surface to even out the look and feel of the texture. A floor buffer with 80-100 grit sand paper is helpful for large areas. Be careful to sand or buff consistently and not to damage the texture. Vacuum, sweep and wash off the excess cement dust and debris. If a taped pattern was installed using Grout Tape or Stone Strips, you may elect to remove them before you proceed to coloring options.

WB Stain

Apply SC-35 using a pump sprayer, airless sprayer, HVLP sprayer, brush or broom. For a mottled effect, use water to pre-dampen the surface before, or in conjunction with the stain. Multiple colors and various amounts of water may be applied at the same time for a variegated finish. SC-35 can be applied in multiple coats to achieve a solid color. Water-Based Stain can be thinned using water, up to equal parts. Thinning will affect the depth of color and may require extra coats.

The coverage will vary depending on the surface. Up to 400 square feet per gallon on a smooth surface and between 150-250 square feet on rough surfaces. Product performs best if applied in thin, even coats. When temperatures are above 80 degrees, it may be necessary to dampen the surface prior to application to prevent material from drying instantly.

Sealer

Apply SC-70 Acrylic Lacquer Sealer by spraying, brushing or rolling with a ½ to ¾ inch nap, non-shedding roller cover at the rate of 200-300 square feet per gallon. If rolled, neatly cut-in all edges with a brush and roll the center using a ½ inch to ¾ inch nap, good quality roller cover.

Sealer Dry Time

You may re-coat as soon as the surface is dry to the touch in 1 to 4 hours, but no later than 24 hours. Light foot traffic may be permitted in 6 hours, normal traffic in 24 hours and vehicle traffic in 72 hours. All times are based on average temperature of 70 degrees and 50% humidity. Cooler temperatures will increase drying time.


DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

4 of 6
Texture-Crete[®] Custom 7/21

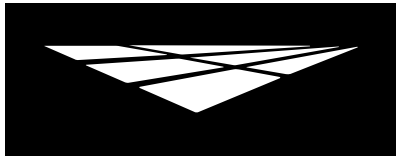

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Texture-Crete[®]

Custom Finish

Optional Materials

Patching

- WP-90 Waterproofing Resin can be used with TC-5 and WP-47 Fiberlath when additional reinforcement is required. Please contact your Westcoat Representative for further information.
- TC-30 Slope Mix can be used to patch and fill holes in concrete under the Texture-Crete System. Please read the TC Slope & Patch System Specification for details.

Primer

- WP-81 Cement Modifier diluted one part to four parts water, can be used in lieu of EC-11, when a cost-effective, acrylic primer is desired.
- EC-12 Epoxy Primer can be used in lieu of EC-11, when maximum adhesion and 100% solids epoxy is desired. When using EC-12, apply at 200-300 square feet per gallon and broadcast 30 grit silica sand to refusal.

Cement Options

- TC-23 Mortar Mix may be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material.
- TC-5 may be used in place of TC-2 for the Texture Coat, to achieve the color desired or for a heavier, non-skid texture.

Pattern Options

- CA-50 Stone Strips can be applied to the grout coat to create a simulated flagstone pattern.
- CA-60 Grout Tape can be used to achieve a tile pattern. The tile size and the grout line size can be varied from job to job to give each installation a custom look.

Coloring Options

- SC-30 Acid Stain can be used in place of Water-Based Stain for a unique mottled look.

Sealer Options

- For textures requiring a more natural look, apply SC-42 WB Hybrid Acrylic Sealer.
- SC-65G WB Gloss Polyurethane Sealer, SC-65F WB Flat Polyurethane Sealer and SC-65SG WB Semi-Gloss Polyurethane Sealer can be used for a low odor, solvent free, mar and chemical resistant sealer.

Skid Resistance

- CA-30 Small Safe Grip or CA-31 Large Safe Grip can be added to the final coat of sealer for added skid resistance.

* Please read Product Specification Sheets on these products prior to use.

Clean Up

Uncured material can be removed with soap and warm water. If cured, material can be removed mechanically or with an environmentally-safe solvent.


DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

5 of 6
Texture-Crete[®] Custom 7/21

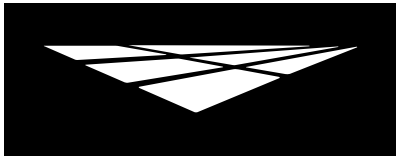

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Texture-Crete[®]

Custom Finish

Maintenance

Exterior surfaces can be swept daily with water and a broom. For tougher dirt or grease, use degreaser diluted with water 20:1 and a soft bristle brush or broom. Be sure to rinse well. To remove calcium or lime build up, brush diluted 100 grain vinegar onto the surface; be sure to rinse any residue.

The Texture-Crete[®] System should be inspected for wear every 2 to 4 years. The system should be resealed with the appropriate Westcoat clear sealer every 3 to 5 years depending upon traffic and UV exposure. Contact the original installer of Westcoat for complete re-coating instructions.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Cements contain silicas; dust mask or respirator should be used when mixing, sanding or grinding.

If using solvent based products, they are extremely flammable. Extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Limitations

- This system is designed for professional use only.
- Read Product Specification Sheets for every product you will be using before beginning the project.
- Do not apply at temperatures below 50°F or above 90°F.
- Rain will wash away uncured Westcoat acrylic products.
- If inclement weather threatens, cover deck to protect new application.
- Sealers will make the surface slippery, please be aware the texture of the surface and how the sealer will affect the look, feel and skid resistance.
- Approval and verification of proposed colors, textures and slip resistance is recommended.
- Do not allow Westcoat products to freeze.
- Railings, fencing, pergolas or other similar features may have the potential to cause cements to dry at different rates, due to the partial sun exposure. This may result in a striping or discoloration in cements. For best practice, it is recommended to mask off these areas to reduce this possible color variation.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

6 of 6
Texture-Crete[®] Custom 7/21



SECTION 099726

CEMENTITIOUS COATINGS

PART 1 GENERAL

1.01 SUMMARY

- A. Section includes: Provide a complete acrylic based cementitious coating system for concrete surfaces that meet the requirements for specific use indicated in the contract documents. Include all applicable substrate testing, surface preparation, and detail work.

1.02 RELATED SECTIONS

- A. Section 033000 – Cast-In-Place Concrete
- B. Section 090000 – Finishes

1.03 SUBMITTALS

- A. Submit under provisions of Section 013300.
- B. Product Data: Submit manufacturer's product data sheets on each product and system to be used including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements.
 - 3. Installation methods.
 - 4. Maintenance requirements.
- C. Selection Samples: For each system specified, provide two sets of samples and color charts, representing manufacturer's full range of colors and patterns.

1.04 QUALITY ASSURANCE

- A. All materials used in the cementitious coating system shall be manufactured and provided by a single manufacturer to ensure compatibility and proper bonding.
- B. Use adequate numbers of skilled workmen that are thoroughly trained and experienced in the necessary crafts and completely familiar with the specified requirements and methods needed for proper performance of the work of this section.
- C. Contractor shall have a minimum of three years experience installing cementitious coatings similar to that which is required for this project and who is acceptable to the manufacturer.
 - 1. Applicator shall designate a single individual as project foreman who shall be on site at all times during installation.
 - 2. Contractor must show and have QCA Qualified Contractor/Applicator paperwork from the manufacturer of the coating system, as required to obtain a long-term jobsite specific warranty.
- D. Convene a pre-application meeting before the start of application of coating system. Require attendance of parties directly affecting work of this section, including: architect, contractor, applicator, and authorized representative of the coating system manufacturer and interfacing trades. Review the following:
 - 1. Drawings and specifications affecting work of this section.
 - 2. Protection of adjacent surfaces.
 - 3. Surface preparation and substrate conditions.
 - 4. Application.
 - 5. Field quality control.
 - 6. Protection of coating system.

7. Repair of coating system.
8. Coordination with other work.

1.05 DELIVERY, STORAGE & HANDLING

- A. Delivery: Materials shall be delivered to the job site in sealed, undamaged containers. Each container shall be clearly marked with manufacturer's label showing type of material, color, and lot number.
- B. Storage: Store all materials in a clean, dry place with a temperature range in accordance with manufacturer's instructions.
- C. Handling: Handle products carefully to avoid damage to the containers. Read all labels and material safety data sheets prior to use.

1.06 PROJECT SITE CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within the limits recommended by the manufacturer.
- B. All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), see EC-15 Moisture Vapor Barrier product specification.
- C. Concrete must be at least 2500 psi.
- D. Concrete must be cured for a minimum of 28 days before coating is applied.
- E. Schedule coating work to avoid excessive dust and airborne contaminants. Protect work areas from excessive dust and airborne contaminants during coating application.
- F. Before any work is started, the applicator shall examine all surfaces for any deficiencies. Should any deficiencies exist, the architect, owner or general contractor shall be notified in writing and any corrections necessary shall be made.

1.07 WARRANTY

- A. Upon completion of the work in this section provide a written warranty from the manufacturer against defects of materials for a period of 5 (five) years. To obtain project specific warranty the coating system applicator must be a Westcoat Qualified Contractor/ Applicator and apply for warranty.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Acceptable manufacturer: Westcoat Specialty Coatings; 4007 Lockridge Street, San Diego, CA 92102. Telephone 800-250-4519. Fax 619-255-7187. Website: www.westcoat.com.

2.02 MATERIALS

- A. As basis of design Westcoat Texture Crete Custom Finish (no substitutions will be accepted): A series of polymer modified cementitious coatings bonded to concrete and has a variety of optional finishes and sealers.

2.03 COMPONENTS

- A. Texture Crete Custom Finish: Decorative cementitious coating designed for concrete resurfacing.
 1. Primer: EC-11 Water-Based Epoxy, 2 parts A to 1 part B by volume). Primer applied at 250-350 square feet per gallon.
 3. Slurry Grout Coat: Combine and mix one 50 pound bag of TC-5 Grout Coat Cement or TC-2 Smooth Texture Cement with TC-40 Liquid Colorant (1 to 4 ounces), 1 gallon of WP-81 Cement Modifier, and up to ½ gallon of water. Apply at 150-200 square feet per batch.
 4. Optional Flagstone Pattern Installation: CA-50 Stone Strips applied to the grout coat in a simulated flagstone pattern.
 5. Optional Tile Pattern: CA-60 Grout Tape applied to grout coat in a simulated tile pattern.

6. Texture Coat: Combine and mix one 50 pound bag of TC-2 Smooth Texture Cement, 1 gallon of WP-81 Cement Modifier, up to ½ gallon of water, and TC-40 Liquid Colorant (1 to 4 ounces). Apply by troweling texture at 150 to 200 square feet per batch.
7. Optional Cement: TC-5 Grout Texture Cement or TC-4 Fine Texture Cement for interior smooth applications may be used in place of TC-2.
8. Water-Based Stain: Apply SC-35 Water-Based Stain at a rate of 150-400 square feet per gallon.
10. Sealer: SC-70 Acrylic Lacquer Sealer applied by spraying, brushing, or rolling at a rate of 200-300 square feet per gallon.

2.04 ACCESSORIES

A. Supplemental Materials:

1. Patching materials: EC-72 Epoxy Patch Gel.
2. Concrete repairs can be made with TC-23 Mortar Mix as needed.
3. WP-47-3 Seam Tape for crack repair.
4. Optional aggregate: CA-30 Small Safe Grip, CA-31 Large Safe Grip, or other sand designed to meet the owners skid resistance requirements.
5. Optional primer: WP-81 Cement Modifier or EC-12 Epoxy Primer can be used in place of the EC-11 Water Based Epoxy.

Optional Topcoats:

6. SC-65G WB Gloss Polyurethane may be used in place of SC-70 when a low odor, solvent free, mar and chemical resistant gloss finish is required.
7. SC-65SG WB Semi-Gloss Polyurethane may be used in place of SC-70 when a low odor, solvent free, mar and chemical resistant semi-gloss finish is required.
8. SC-65F WB Flat Polyurethane may be used over the SC-65G Gloss or SC-65SG Semi-Gloss, when low odor, solvent free, mar and chemical resistant flat finish is required.
9. EC-95G Gloss Polyurethane Topcoat may be used in place of SC-70 when a gloss, solvent-based polyurethane is required.
10. EC-95F Flat Polyurethane Topcoat may be used over EC-95G when a flat, solvent-based polyurethane topcoat is required

2.05 SOURCE QUALITY CONTROL

A. Verification of Performance

1. Physical Properties: The finish Texture-Crete Custom System shall have the following approximate performance characteristics:

a. Bond Strength to concrete (ASTM C297)	278 PSI
b. Bond Strength after accelerated aging (ASTM C756)	249 PSI
c. Abrasion Test (ASTM D1242)	11% reduction
d. Freeze thaw on concrete (ASTM C67)	171 PSI
e. Concentrated load (AC39)	No apparent damage
f. Water absorption (ASTM D570)	6.5%
g. Percolation test (AC39 Sec. 4 G)	.25 inches
h. Tensile Strength (ASTM C190-85)	855 PSI
i. Compressive Strength (ASTM C109-88)	5690 PSI
j. Flexural Strength	1835 PSI
k. Impact Strength	22 in/lbs.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verification of Conditions.

1. Inspect all surfaces to receive cementitious coating. Verify that surfaces are dry, clean, and free of contaminants that would prevent epoxy flooring from properly adhering to the surface.
2. Conduct calcium chloride testing according to ASTM F1869.

3. Conduct surface profile inspection according to ICRI Technical Guideline No.03732.
4. Before starting work, report in writing to the authority having jurisdiction any unsatisfactory conditions.

3.02 SURFACE PREPARATION

- A. Prepare surfaces using methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- B. Create a surface profile equal to CSP 3 as specified ICRI.
- C. Clean Surfaces thoroughly prior to installation.
- D. Rout and clean moving cracks and joints: fill with manufacturer's recommended flexible epoxy filler material.
- E. Repair any non-moving surface deviations with manufacturers recommended patching material.

3.03 INSTALLATION

- A. Install coatings in accordance with manufacturer's instructions.
- B. Mix all materials in accordance with manufacturer's instructions.
- C. Use application equipment, tools, and techniques in accordance with manufacturer's instructions.
- D. Uniformly apply coatings at spread rates and in number of coats to achieve specified coverage.
- E. Adhere to all limitations, instructions, and cautions for cementitious coating as stated in the manufacturer's published literature.

3.04 FIELD QUALITY CONTROL

- A. Verify coatings and other materials are as specified.
- B. Verify coverages and finish of the system as work progresses.
- C. Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of coating systems.

3.05 PROTECTION AND CLEAN-UP

- A. Installation areas must be kept free from traffic and other trades during the application procedure and cure time.
- B. Protect finished surfaces of coating system from damage during construction.
- C. Touch-up, repair or replace damaged flooring system after substantial completion.
- D. Clean area and remove all debris upon completion of work. Dispose of empty containers properly according to current local, state and federal regulations.
- E. Allow material to cure 4 to 6 hours before light pedestrian traffic is permitted, 24 hours before heavy traffic and an additional 72 hours before vehicular traffic is permitted.

3.06 MAINTENANCE

- A. Contractor shall provide to owner, maintenance and cleaning instructions for the cementitious coating system upon completion of work. Owner is required to clean and maintain the surfaces to maintain manufacturer's warranty.

END OF SECTION

This guide specification has been prepared by Westcoat Specialty Coating Systems to assist design professionals in developing a project specific specification. This guide is a template that must be reviewed and adapted by specifiers to comply with project requirements. This guide specification is not to be copied directly into a project specification manual without review.



TC-40 is shown here mixed into TC-2 Smooth Texture White Cement.



Bark | 305

3/4 oz.



2 oz.



Cinnamon | 304

3/4 oz.




2 oz.




Peach | 302

3/4 oz.




2 oz.



Clay | 309

3/4 oz.



2 oz.



Straw | 301

3/4 oz.



2 oz.



Smoke | 308

3/4 oz.



2 oz.



Yellow | 311

3/4 oz.



2 oz.



Raw Umber | 312

3/4 oz.



2 oz.



CAUTION:

Color will vary between products and sheens. This chart is for reference only. Please request an actual color sample or apply sample on site before beginning any project.





Applied over TC-4 Fine Texture Cement



Shale | 516



Armor | 514



Onyx | 509



Sienna | 513



Copper | 508



Adobe | 515



Sahara | 518



Umber | 521



Olive | 520



Camel | 505



Sepia | 511



Mahogany | 501

Not shown but also available in Ivory | 517



CAUTION:

Color will vary between products and sheens. This chart is for reference only.
Please request an actual color sample or apply sample on site before beginning any project.





Blends have been applied over TC Cements see back for reference chart.



Coffee



Henna



Auburn



Tobacco



Russet



Dust



Arroyo



Suede



Luna



Flintstone



Tornado



Raven



CAUTION:

Color will vary between products and sheens. This chart is for reference only.
Please request an actual color sample or apply sample on site before beginning any project.



WATER-BASED STAIN BLENDS	Texture-Coat Cement	Liquid Colorant	Formula
Arroyo	TC-2 White Texture Cement	1/4 ounce Cinnamon	2 Parts Ivory : 1 Part Sepia
Auburn	TC-2 White Texture Cement	1/4 ounce Cinnamon	Adobe
Coffee	TC-2 White Texture Cement	1/4 ounce Smoke	2 Parts Mahogany : 1 Part Onyx
Dust	TC-2 White Texture Cement	1/4 ounce Cinnamon	Umber
Flintstone	TC-5 Light Gray Texture Cement	n/a	2 Parts Water : 1 Part Sepia
Henna	TC-2 White Texture Cement	1/4 ounce Cinnamon	4 Parts Adobe : 1 Part Copper
Luna	TC-2 White Texture Cement	1/4 ounce Smoke	Shale
Raven	TC-2 White Texture Cement	1/4 ounce Smoke	Onyx
Russett	TC-2 White Texture Cement	1/4 ounce Cinnamon	4 Parts Sahara : 1 Part Adobe
Suede	TC-2 White Texture Cement	1/4 ounce Cinnamon	8 Parts Water : 1 Part Sepia
Tobacco	TC-2 White Texture Cement	1/4 ounce Cinnamon	3 Parts Water : 1 Part Mahogany
Tornado	TC-2 White Texture Cement	1/4 ounce Smoke	6 Parts Shale : 1 Part Onyx

- Color will vary. This chart is for reference only. Please apply sample on site before beginning any project.
- Please contact your distributor or a Westcoat representative for detailed Water-Based Stain Blend instructions.
- All SC-35 Water-Based Stain colors need to be boxed or combined per formula prior to application..

