
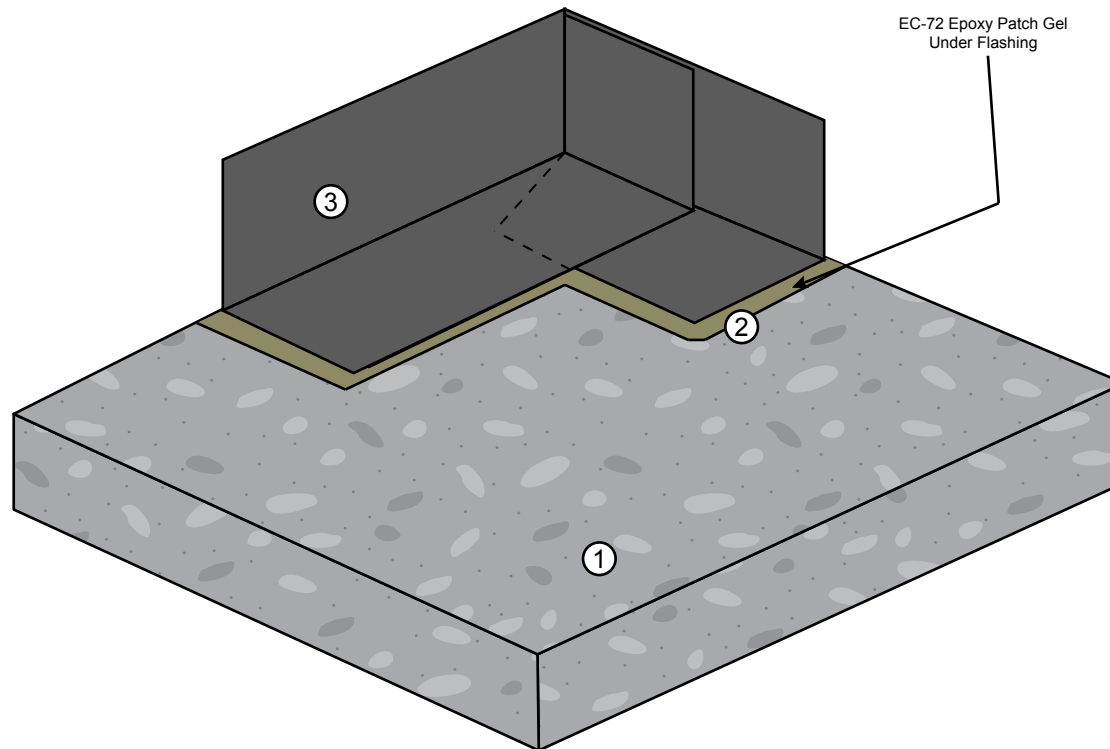
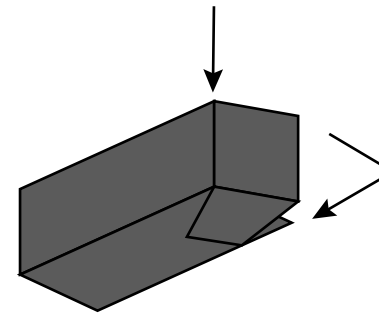
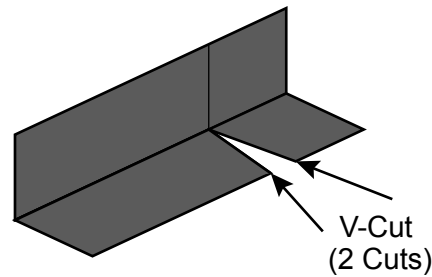


## Site Built Piece

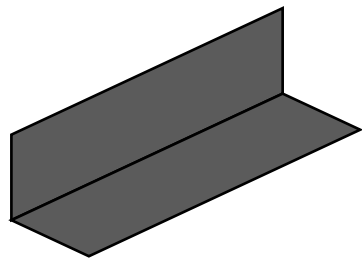

## KEYNOTES

- ① Concrete Substrate
- ② EC-72 Epoxy Patch Gel
- ③ Bonderized Sheet Metal

### IAPMO ER-587

- Concrete must be a min 2" thick & 2,500 PSI.
- Concrete should be prepared to a profile equal to CSP 3.
- Flashing should be a minimum 4"x4"
- Standard overlap is bottom to top with a 4" overlap.
- Apply WP-53 on all flashing seams and overlaps.
- Minimum 1/4" slope required on all decks
- Refer to local building codes and standards.
- Refer to all related Product and System Specifications for additional information.

All details are for reference only and should be evaluated by architect. These details are not a substitute for specifications, plans or evaluation reports. Architect, consultant or similar professional should be review prior to major waterproofing applications.

REV. 5/12/25 TC

## MACOAT SYSTEM - INSIDE CORNER FLASHING

DIVISION 07 18 13  
Pedestrian Traffic Coatings

SCALE : NTS



**westcoat**®

4007 Lockridge Street • San Diego, CA • 92102  
800.250.4519 • westcoat.com