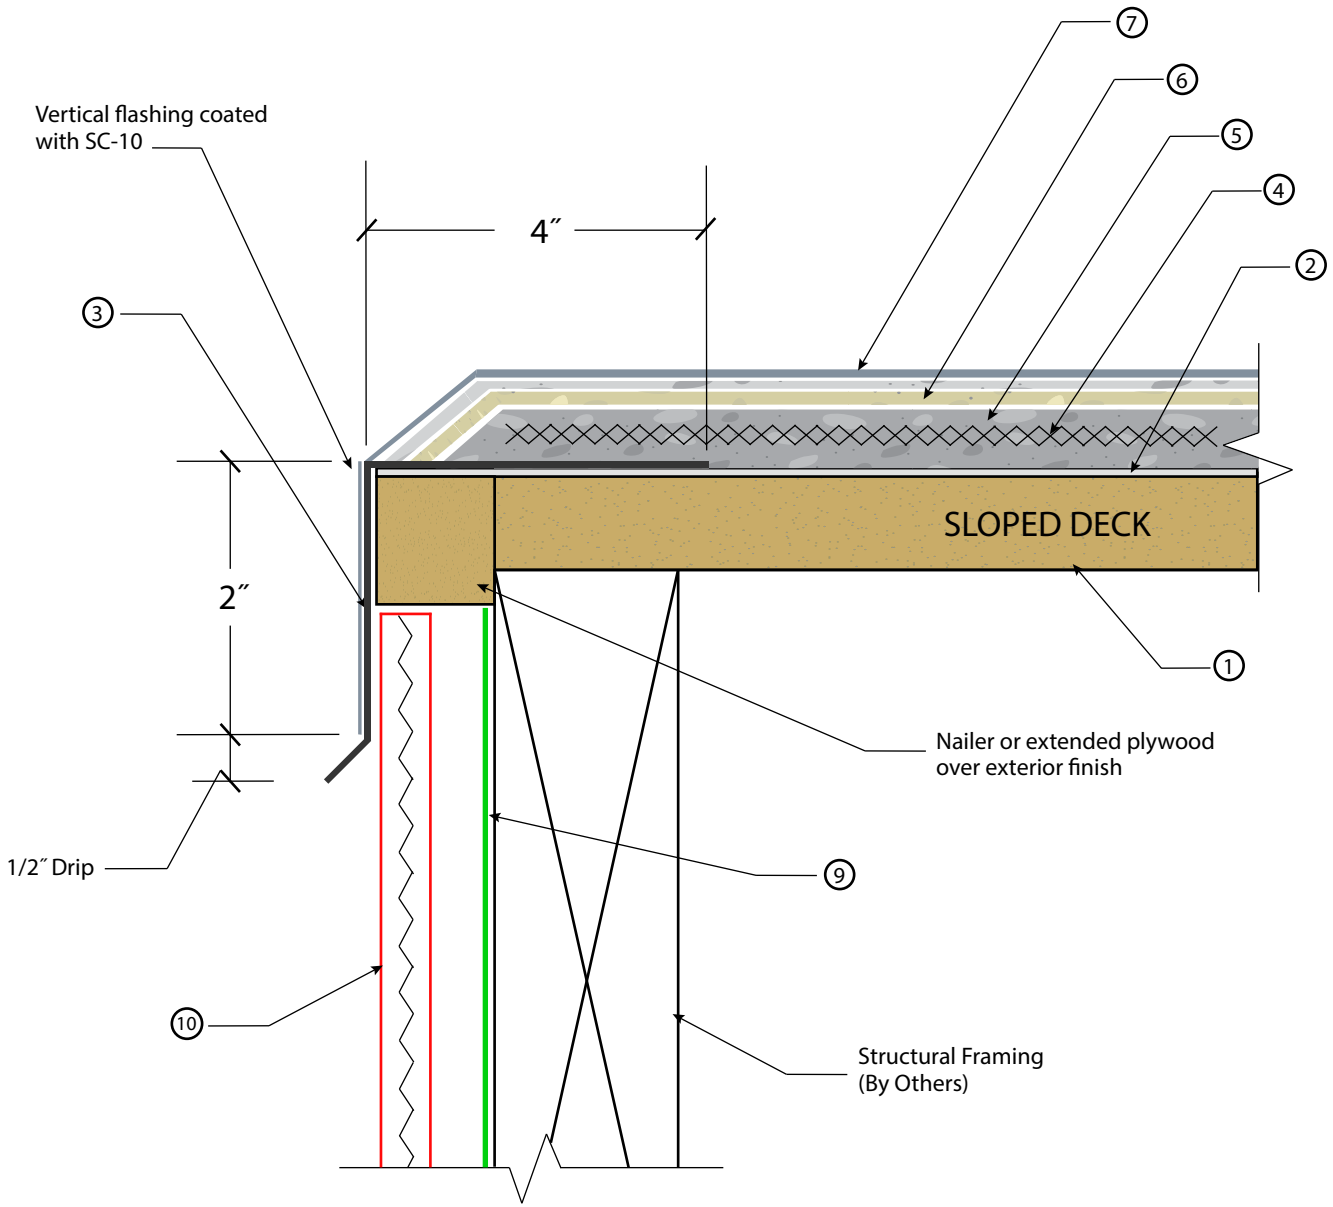

KEYNOTES

1. 5/8″ MIN. Exposure 1 Sheathing (3/4″ Recommended)
2. WP-40 Sheet Membrane
3. 26 Gauge, Bonderized Flashing MIN. 4″ on deck and 6″ height.
4. WP-25 Metal Lath
5. Base Coat
6. Fiberlath Resin Membrane
7. Slurry Coat
8. Texture Coat and Topcoat
9. Building Paper (By Others)
10. Stucco Finish (By Others)

IAPMO ER - 587

- Metal Lath and Base Coat held back from edge by 2″
- Fiberlath Resin Membrane held back from edge by 1/2″
- Slurry Coat, Texture Coat and Topcoat applied to edge of deck.
- Standard overlap is bottom to top with a 4″ overlap.
- Apply WP-51 on all flashing seams and overlaps.
- Minimum 5/8″ exterior grade plywood.
- Minimum 1/4″ slope required on all decks
- Refer to local building codes and standards.

ALX PRO - EDGE METAL FLASHING OVER STUCCO FASCIA

DIVISION 07 18 13
Pedestrian Traffic Coatings

SCALE : NTS

westcoat
SPECIALTY COATING SYSTEMS
4007 Lockridge Street · San Diego, CA · 92102
800.250.4519 · westcoat.com