



ABOUT LEVEL-IT:

Beautify your interior floor with TC Interior, a line of systems specifically designed for the interior environment. Add style to any decor: choose either a smooth or slightly textured finish, pick from a variety of color and pattern choices, and finish with a durable stain or high gloss sealer. Color with Acid Stains and Water-based Stains or simply trowel smooth for a sleek concrete look.



ULTRA-TOUGH. PROTECTIVE.

- Decorative
- Cost-effective
- Fast drying
- Low maintenance
- Durable
- Available skid-resistant finish
- Optional solvent-free installation
- Variety of colors and patterns
- Applied over existing concrete



FOR PROFESSIONAL USE ONLY.





TC-25 WHITE AND TC-26 GRAY

Cement-based materials that self-level and cure quickly when mixed with water can be installed from 1/4 to 2 inches thick to smooth, level, and resurface concrete.

SELF-LEVELING

Level uneven floors with ease. Level-It self-levels rough, irregular, unattractive interior floors in one application.

FAST DRYING, QUICK TURNAROUND

Perfect for applications requiring a fast turnaround time, complete system can be done in one day.

SUPERIOR STRENGTH

Level-It's high compressive strength protects from foot and light wheel traffic.

STAIN AND SEAL

Level-It can be stained and sealed in a number of stains and finishes for a decorative flooring option.

UNDERLAYMENT

Level-It can be used as a self-leveling underlayment for Westcoat's Texture-Crete or Epoxy systems or other flooring options such as hardwood, laminate, or carpet.

POLISHING

Westcoat's self-leveling cements can be polished for a clean, modern look.

Level-It – Stain and Seal




Patched Concrete Primer Level-It Coat Color Coat Seal



HAVE A QUESTION? GET IN TOUCH:

westcoat.com / 800.250.4519 / info@westcoat.com

4007 Lockridge Street, San Diego, CA 92102, USA.

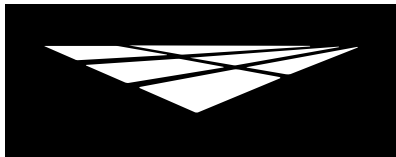


Description

Westcoat's Level-It™ Polish System is an interior, cementitious, self-leveling flooring system that provides a finished floor with the look and feel of stained and polished concrete. It can be installed from 3/8 to 2 inches thick, then ground, stained and polished with a variety of colors available. Level-It™ Polish System provides a high-build, quick drying solution for uneven interior floors or where existing concrete substrates may not be suitable for staining and polishing. Level-It™ Polish System can be installed in both commercial and residential environments and features an optional concrete stain.

Uses

Level-It™ Polish System is designed to transform rough, uneven or unattractive interior concrete into a decorative surface. For use over existing concrete substrates such as sun-rooms, interior floors, offices and showrooms. Level-It™ Polish System can be installed in both the commercial and residential environments.


System Overview

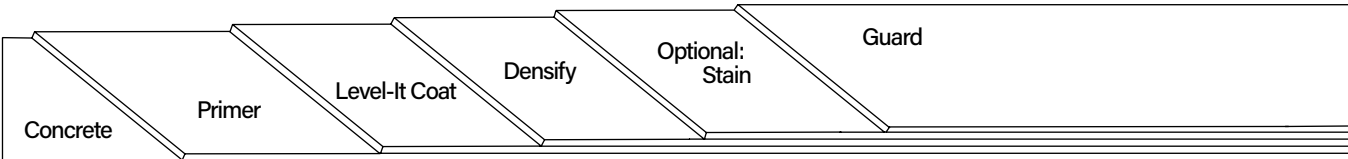

System Data

Coverages	Primer	Level-It™ Coat	Densify	Optional: Stain	Guard
	Up to 3/4" thick: 120-160 ft ² per gallon Greater than 3/4" thick: 60-100 ft ² per gallon	16 ft ² at 3/8 inch 12 ft ² at 1/2 inch per batch	200-400 ft ² per gallon	200-400 ft ² per gallon	2000-2500 ft ² per gallon
Components	EC-12 Epoxy Primer TC-27 Level-It™ Cement TC-29 Concrete Patch SC-21 Lithium Silicate SC-36 Fast Stain SC-24 Polish Guard		Shelf Life 2 years 6 months 1 year 3 years 5 years 3 years		
Note: System components may vary, depending on desired result. *** Must Mix TC-27 for a minimum of 3 minutes ***					

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

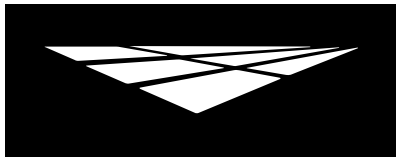

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Level-It™

Polish

Advantages

Minimal Downtime • Cost Effective • High Build • High Strength • Polished Concrete Aesthetic • Low VOC's

Inspection

Concrete must be clean, dry and free of grease, paint, oil, dust, curing agents, laitance or any foreign material that will prevent proper adhesion. The concrete should be at least 2,500 PSI. The concrete should be porous and able to absorb water. A minimum of 28 days curing time is required on all concrete. Prior to starting work, test existing concrete slab for efflorescence, moisture and hydrostatic pressure.

Moisture

All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), please refer to the EC-15 Moisture Vapor Barrier Product Specification Sheet.

Preparation

Remove all coatings to a sound, concrete base. Prepare concrete to a profile equal to CSP 3-5 as specified by ICRI. Surface and environmental temperature should be between 50F degrees and 85F degrees.

Joints

All joints or moving cracks should be honored up through the Level-It™ System and treated with an appropriate compound that is designed for moving joints. Failure to properly address joints and moving cracks may cause the TC-27 to fracture or disbond from the substrate.

Crack Treatment

The treatment of dormant cracks can help minimize their appearance through the Level-It™ System, but should movement occur, these cracks may return. Dormant cracks can be treated as follows. Cut out cracks and fill with EC-72 Epoxy Patch Gel. Broadcast #30 silica sand onto the wet epoxy to provide a rough surface for the TC-27 to bond.

Concrete Repair

For concrete that needs repairs beyond just dormant cracks, TC-23 Mortar Mix can be used. TC-23 is designed to be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material under most Westcoat systems. Please refer to the TC-23 Mortar Mix Product Specification Sheet for details.

Primer


Mix 2 parts A with 1 part B (by volume) of EC-12 Epoxy Primer together for 3-4 minutes with a low speed drill. Be sure to scrape the sides and bottom of the container during mixing. For applications up to ¾ inches thick, immediately apply at a rate of 120-160 square feet per gallon using a trowel or squeegee and then back roll to ensure complete coverage. Promptly, broadcast the surface with #20 silica sand till refusal. This will aid in the adhesion of the Level-It™ Coat. For applications greater than ¾ inch thickness, it is recommended to apply the EC-12 at 60-100 square feet per gallon and broadcast the surface with #16 silica sand till refusal. Allow ~8 hours to dry (at 70F degrees) and then vacuum all excess sand. Ensure there are no bald or bare spots without sand, before proceeding with the application of the Level-It™ Coat.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 6
Level-It™ Polish 7/20

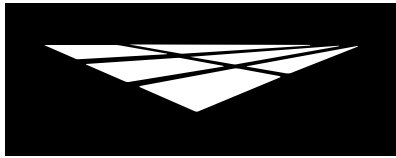

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Level-It™

Polish

Level-It™ Coat

Prior to application, acclimate material to 50-75F degrees before use. In a clean mixing vessel, add 4¼ to 4¾ quarts of potable water (DO NOT EXCEED 4¾ quarts of water), then slowly add (1) 60 pound bag of TC-27 and mix thoroughly using a helix/spiral mixing paddle (designed for use with Self-Leveling Cements) for a minimum of 3-5 minutes, ensuring a homogeneous mix is achieved. Do not overmix and avoid moving the mixing paddle excessively, as this can entrap air and may lead to pinholes in the TC-27. Cold water can be substituted in the mix to help extend working time in warmer temperatures. Multiple bag batches can be made if needed and can provide a more consistent result. If an integral color is desired, 1-4 ounces of TC-40 Liquid Colorant may be added to the water addition, prior to adding the TC-27.

Coverage

One 60 pound bag will cover ~16 ft² at ⅜ inch or ~12 ft² at ½ inch. Coverage will vary depending on use.

Applying Product

TC-27 can be installed from ⅜ inches up to 2 inches thick. For foot traffic and light duty areas, apply at a minimum thickness of ⅜ inch. For medium duty areas with heavier rubber-wheel traffic, apply at a minimum thickness of ½ inch. The maximum thickness should not exceed 2 inches. After thoroughly mixing, pour material onto the substrate and place with a gauge rake to the desired elevation. After placing with a gauge rake, a spike roller can be used to help reduce entrapped air. Do not over work the spike roller. Finally, use a smoother to flatten and finish the surface. If a spike roller is used, a smoother must be used across the entire surface to eliminate discoloration caused by the spike roller. TC-27 has a flow life of 5-10 minutes (@ 70F degrees) and each mix should be tied in within 5 minutes. Always maintain a wet edge.

Level-It™ Coat Dry Time

Light foot traffic may be permitted in 3 to 5 hours @ 70F degrees. Allow a minimum 24 hours before grinding. For best results, allow 72 hours before grinding. The surface should be protected from other trades, dirt and other foreign materials until final topcoat or sealer has fully cured. Do not permit forklifts, scissor lifts or other heavy loads for at least 48 hours. Dry time will vary depending on use and climate.

Metal Bond Tooling

After allowing the TC-27 to properly dry, proceed with an initial cut using 30/40 metal bond diamonds. Next proceed with 60/80 metal bond diamond tooling to achieve a clean, uniform, porous surface that will allow the stain and sealer to soak in. Additional tooling and passes may be required, depending on the desired finish. Care should be taken to avoid grinding the surface too smooth, as this can prevent the stain and sealer from adhering. Vacuum the surface entirely and ensure that any dust or contaminants are removed, as these will deter adhesion.

Densify


Apply SC-21 Lithium Silicate at a rate of 200 to 400 square feet per gallon, wetting the surface evenly. Do not allow the SC-21 to puddle. For best results, spray the densifier and spread with a microfiber pad or broom, keeping it wet for 20 minutes. When applying to a very porous surface, a second coat may be applied after the first coat has dried. Allow the SC-21 to dry before continuing.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 6
Level-It™ Polish 7/20

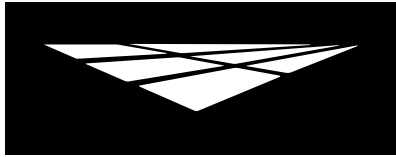

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Level-It™

Polish

50 Grit Transitional Tooling

Once densifying is complete, grind the entire floor with 50 grit ceramic transitional diamonds. Vacuum the entire floor to remove dust.

Patching

If pinholes or imperfections occur after the Level-It™ coat dries, fill them with TC-29 Concrete Patch. Mix 4 parts TC-29 with 1½ parts water with a mechanical mixer at a low rpm for 1-2 minutes. Apply TC-29 with a rubber float over pinholes or imperfections and let dry for 2-3 hours before grinding. Additional patching may be required after grinding. Be sure to vacuum thoroughly after grinding.

100 Grit Transitional Tooling

Once patching is complete, grind the entire floor with 100 grit ceramic transitional diamonds. Vacuum the entire floor to remove dust.

Diamond Resins

Continue the polishing process with 100 grit resin, then move to 200 grit resin and then 400 grit resin. Be sure to clean the floor after each pass to remove all dust. After the 400 grit resin, you are ready for coloring. Be sure all dust has been removed and the surface is clean, prior to staining.

Fast Stain Polish Coloring (Optional)

The Fast Stain should be applied after using 400 grit resin diamonds. This will allow the Fast Stain to penetrate and to be polished up to meet the desired gloss. Mix SC-36 Fast Stain with acetone and place material into a solvent safe, pump style sprayer. Apply at a rate of 200 to 400 square feet per gallon. Coverage will vary due to porosity and desired effect. Let the SC-36 dry for 20 minutes before applying additional colors. Be sure to cross ventilate and allow the solvent to dissipate prior to polishing.

Final Polish

Continue to polish with 800 grit resin. Once polishing is complete, broom and vacuum to remove dust. Fast Stain may be reapplied to achieve the final color desired. For a higher gloss level, polish up to 3000 grit. Be sure to clean and remove all dust prior to applying Guard.

Guard

SC-24 Polish Guard can be applied once the floor is polished to the desired level. Before applying, be sure the floor is clean and free of dirt, dust or debris. For best results, thin SC-24 with equal parts water, spray material onto the surface and spread thin and evenly with a microfiber pad. Coverage is approximately 2000 to 2500 square feet per gallon.

Allow the SC-24 Polish Guard to dry completely before burnishing. Additional coats may be applied. Burnishing is recommended in between coats. For best results, burnish the same day.


DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

4 of 6
Level-It™ Polish 7/20

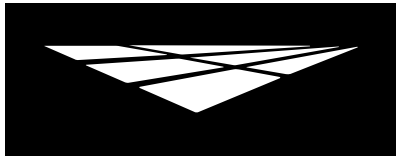

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Level-It™

Polish

Burnish

Once guard is completely dry, burnish with 800 and then 1500 burnishing pads. If the floor was polished greater than 800 grit diamond resin, use a burnishing pad that is equal or greater to the highest grit resin used. Be sure to clean pad between each diamond change. When final burnish is completed, you can reoccupy the space.

Clean Up

Uncured material can be removed with soap and warm water. If cured, material can be removed mechanically or with an environmentally-safe solvent.

Optional Materials

Cement Options

- TC-23 Mortar Mix may be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material.
- TC-26 Cement may be used in lieu of TC-27 when a Gray Self Leveling Cement without aggregate look is desired.

Integral Coloring Options

- TC-40 Liquid Colorant may be added to the TC-27, when an integral color is desired. The typical amount is 1-4 ounces per 60 pound bag of cement, not to exceed 10 ounces.

* Please refer to Product and System Specification Sheets for additional information.

Maintenance

The Level-It Polish System is a low maintenance flooring system, but still requires basic care and scheduled cleaning. Floors should be swept daily with a dust mop or microfiber pad. Spills should be cleaned up promptly.

Additional cleaning with water and/or a pH neutral cleaner may be performed as needed. Be sure to test any cleaning agents in an inconspicuous area prior to use. Polished floors can be rejuvenated by repeating the final steps of the polishing process. In some cases, simply burnish with a high speed burnisher equipped with a diamond impregnated pad to rejuvenate the gloss.

SC-24 Polish Guard can be applied quarterly or as required per scheduled maintenance. Floors should be scrubbed and cleaned before reapplying SC-24 Polish Guard.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Contains portland cement. Wear rubber gloves and eye protection. Avoid eye contact and prolonged contact with skin. Wash thoroughly after handling. If eye contact occurs, flush with water for 15 minutes. Call a physician immediately.

If using solvent based products, they are extremely flammable. Extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.


DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

5 of 6
Level-It™ Polish 7/20

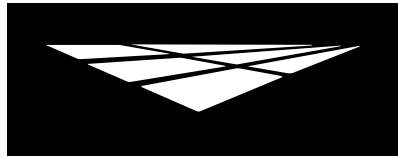

westcoat[®]
SPECIALTY COATING SYSTEMS

**SYSTEM
SPECIFICATION**

TC

TEXTURE COAT
DECORATIVE TEXTURED SURFACES

Level-It™

Polish

Limitations

- This system is designed for professional use only.
- Read Product Specification Sheets for every product you will be using before beginning the project.
- All materials should be kept between 50°F-75°F.
- Do not apply at temperatures below 50°F or above 85°F.
- Temperatures should remain stable within 50°F and 85°F for at least 72 hours after installation of the TC-27.
- Not designed to be used for exterior applications or areas with constant water exposure.
- Use dustless equipment in well-ventilated areas.
- Level-It™ Polish System is not recommended in locations where freezing temperatures may occur.
- Level-It™ Polish System will produce a highly durable and hard surface, but damage can occur due to impact by metal objects, such as steel casters or wheels, metal equipment or nails projecting out of pallets.
- Westcoat cannot be responsible for issues related to improper joint treatment or cracks.
- Pinholes may occur due to substrate, temperatures, varied batches and application methods.
- Level-It™ Polish System is designed to have a non-uniform appearance and variances in appearance should be expected.
- Level-It™ Polish System is not designed for chemical environments, that require a chemically resistant topcoat or sealer. Please refer to our Level-It™ Grind, Stain and Seal System for more information on this option.
- Cracking in cementitious overlays can occur and it is not possible to foresee the appearance of cracking in these non-structural slabs. Reflective cracking, map cracking, crazing or hairline cracking may occur. These types of cracking can occur due to numerous reasons, such as vibration, deflection, substrate movement, joints and cracks and rapid evaporation during curing.
- Do not allow Westcoat products to freeze.
- Must mix TC-27 material for a minimum of 3 minutes.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

6 of 6
Level-It™ Polish 7/20



WESTCOAT SPECIALTY COATING SYSTEMS
LEVEL-IT POLISH SYSTEM

SECTION 03 53 00

Polished Concrete Toppings

PART 1 GENERAL

1.1 SUMMARY

- A. Section includes: Provide a complete interior, self-leveling, cementitious coating system for concrete surfaces that meet the requirements for specific use indicated in the contract documents. Include all applicable substrate testing, surface preparation, and detail work in accordance with industry standards.

1.2 RELATED SECTIONS

- A. Section 03 01 00 - Maintenance of Concrete
- B. Section 03 01 40 - Maintenance of Precast Concrete
- C. Section 03 30 00 - Cast-in-Place Concrete
- D. Section 03 40 00 - Precast Concrete
- E. Section 07 91 29 - Joint Fillers
- F. Section 09 61 00 - Flooring Treatments

1.3 REFERENCES

- A. ASTM C109 Standard Test Method for Compressive Strength of Hydraulic Cement Mortars
- B. ASTM C348 Standard Test Method for Flexural Strength of Hydraulic-Cement for Curing Concrete
- C. ASTM E430 Standard Test Method for Measurement of Gloss of High-Gloss Surfaces by Abridged Goniophotometry
- D. ASTM F710 Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring
- E. ASTM F1869 Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
- F. ASTM F2170 Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes

1.4 SUBMITTALS

- A. Submit under provisions of Section 013300.
- B. Product Data: Submit manufacturer's product data sheets on each product and system to be used including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements.
 - 3. Installation methods.
 - 4. Maintenance requirements.
 - 5. Safety Data Sheets.
- C. Qualification Data: Provide documentation from manufacturer that applicator is a qualified applicator and qualifies for manufacturer's warranty.
- D. Selection Samples: For each system specified, provide two sets of samples and color charts, representing manufacturer's full range of colors and patterns.

1.5 QUALITY ASSURANCE

- A. Manufacturer:
All materials used in the cementitious coating system shall be manufactured, provided or approved by Westcoat Specialty Coating Systems, to ensure compatibility and proper bonding.
- B. Applicator:
 - 1. Use adequate numbers of skilled applicators that are thoroughly trained and experienced in the necessary crafts and are completely familiar with the specified requirements and methods needed for proper performance of the work of this section.
 - 2. Contractor shall have a minimum of three years experience installing cementitious coatings similar to that which is required for this project and who is acceptable to the manufacturer.
 - 3. Applicator shall designate a single individual as project foreman who shall be on site at all times during installation.
 - 4. Contractor must show and have QCA Qualified Contractor/Applicator paperwork from the manufacturer of the coating system, as required to obtain a long-term jobsite specific warranty.
- C. Samples:
 - 1. Cured samples for reference and approval. Cured samples should be similar to the materials that are specified. These samples should correctly depict the desired the desired color, texture, etc for the project.
 - 2. Approved samples should be ready and available onsite, during the application process and for final review of completed work.
 - 3. Mock-up: Prior to starting the application, an on-site mock-up must be performed using the same application team, materials and equipment that will be used during the application. This mock-up should be thoroughly reviewed and if approved, left in place for the duration of the application and used for final approval.
- D. Pre-Installation Meeting: Convene a meeting before the start of surface preparation and the application of coating system. Require attendance of parties directly affecting work of this section, including: architect, contractor, applicator, and authorized representative of the coating system manufacturer and interfacing trades. Review the following:
 - 1. Drawings and specifications affecting work of this section.
 - 2. Protection of adjacent surfaces.
 - 3. Surface preparation and substrate conditions.
 - 4. Application.
 - 5. Field quality control.
 - 6. Protection of coating system.
 - 7. Repair of coating system.
 - 8. Coordination with other work.

1.6 DELIVERY, STORAGE & HANDLING

- A. Delivery: Materials shall be delivered to the job site in sealed, undamaged containers. Each container shall be clearly marked with manufacturer's label showing type of material, color, and lot number.
- B. Storage: Store all materials in a clean, dry place with a temperature range in accordance with manufacturer's instructions.
- C. Handling: Handle products carefully to avoid damage to the containers. Read all labels and material safety data sheets prior to use.

1.7 PROJECT SITE CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, ventilation, etc.) within the limits recommended by the manufacturer.

- B. Concrete shall be tested for moisture before applying cementitious coating. Comply with manufacturer's written instructions and guidelines for substrate temperature, acceptable moisture content levels and temperature.
- C. Concrete must be at least 2500 psi and prepared to a surface profile equal to CSP 3-5, per ICRI Standards.
- D. Concrete must be cured for a minimum of 28 days before coating is applied.
- E. Schedule coating work to avoid excessive dust and airborne contaminants. Protect work areas from excessive dust and airborne contaminants during coating application.
- F. Before any work is started, the applicator shall examine all surfaces for any deficiencies. Should any deficiencies exist, the architect, owner or general contractor shall be notified in writing and any corrections necessary shall be made.
- G. Substrate and Installed Coating Protection:
 - 1. Ensure that substrates and installed coatings are protected against oil, dirt, debris, metal, excessive water, marking paint, hydraulic or any equipment fluids, or any other agents that may negatively affect the coating.
 - 2. All trades must protect the substrate and installed coating at all times. Failure to do so can negatively affect the finished surface.
 - 3. Pipe-cutting and metal storage should not be allowed over surfaces.
 - 4. Application areas should be closed to traffic during installation process and for a period of time after application is complete, as recommended by the manufacturer.

1.8 SCHEDULING AND SITE COORDINATION

- A. Coordination with all other trades should occur to ensure that other installations and construction are not interfering with the application of the cementitious topping.
- B. Ensure that adequate staffing and personnel are onsite to properly apply materials.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable manufacturer: Westcoat Specialty Coatings; 4007 Lockridge Street, San Diego, CA 92102. Telephone 800-250-4519. Website: www.westcoat.com.

2.2 MATERIALS

- A. As basis of design Westcoat Level-It Polish System: Interior self-leveling flooring system that can be installed from 3/8 inch to 2 inches, then mechanically polished. Acceptable products include:
 - 1. Primer
EC-12 Epoxy Primer: a two component, 100% solids, low viscosity, moisture tolerant, fast drying, high strength and multi-purpose epoxy primer.
 - 2. Cementitious Polishable Overlay
TC-27 Gray Self-Leveling Cement: a professional grade, pourable, self-leveling, cementitious topping that features an "aggregate appearance".
 - 3. Densifier
SC-21 Lithium Silicate: an easy to apply, ready to use concrete densifier. SC-21 is zero VOC and will help create a dense, hard surface which will minimize any future dusting, improve the sheen, strength of the surface.
 - 4. Concrete Dye Stain (Optional)
SC-36 Fast Stain: a solvent soluble, deep penetrating, fast drying, drop in powder stain.
 - 5. Polish Guard
SC-24 Guard: a single component finish designed for polished concrete and polished overlays. SC-24 is burnishable, water-based, VOC compliant and low odor.

2.4 ACCESSORIES

A. Supplemental Materials:

1. Patching and crack treatment
EC-72 Epoxy Patch Gel: a high viscosity, two component, 100% solids epoxy patching compound.
2. Integral Colorant (optional)
TC-40 Liquid Colorant: Westcoat TC-40 Liquid Colorant is a water-based slurry formulated with high pigment levels of 60-70% and is designed to tint Westcoat cements to a variety of colors.
3. Optional Cements
TC-25 Self-Leveling Cement: a white, cementitious, self-leveling overlay.
TC-26 Grey Self-Leveling Cement: a grey, cementitious, self-leveling overlay without aggregate appearance.
4. Patching/Grouting Material
TC-29 Concrete Patch: a Westcoat TC-29 Concrete Patch is a specially formulated proprietary cement blend that is used to patch and fill holes, spawls and minor cracks for interior concrete floors.
5. Silica Sand
#20 grit silica sand: Silica Sand is broadcasted over the wet EC-12 prior to the application of the cementitious polishable overlay.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verification of jobsite conditions should comply per Section 01 00 00.
- B. Follow manufacturer's installation instructions.
- C. Protect substrate and adjacent areas from other trad and do not permit water or debris exposure.
- D. Moisture Vapor Transmission Rate
 1. Conduct calcium chloride testing according to ASTM F1869.
 2. Up to 5 lbs per 1000 square feet is acceptable. If moisture vapor rates exceed this value, please contact your Westcoat Representative for acceptable MVTR methods.
- E. Relative Humidity
 1. Perform RH Reading in accordance with ASTM F2170.
 2. Up to 85% is acceptable. If RH exceeds this value, please contact your Westcoat Representative.
- F. Alkalinity Testing
 1. Test concrete in accordance with ASTM F710 to measure pH.
 2. Concrete substrates should be between 8 and 14 pH.

3.2 SURFACE PREPARATION

- A. Prepare surfaces using methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- B. Create a surface profile equal to CSP 3-5 per ICRI.
- C. Clean Surfaces thoroughly prior to installation.
- D. Rout and clean moving cracks and joints: fill with manufacturer's recommended filler
- E. Repair any non-moving surface deviations with manufacturer's recommended material.

3.3 INSTALLATION

- A. Install coatings in accordance with manufacturer's instructions.
- B. Mix all materials in accordance with manufacturer's instructions.

- C. Use application equipment, tools, and techniques in accordance with manufacturer's instructions.
- D. Uniformly apply coatings at spread rates and in number of coats to achieve specified coverage.
- E. Adhere to all limitations, instructions, and cautions for cementitious coating as stated in the manufacturer's published literature.

3.4 FIELD QUALITY CONTROL

- A. Verify coatings and other materials are as specified.
- B. Verify coverages and finish of the system as work progresses.
- C. Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of coating systems.

3.5 PROTECTION AND CLEAN-UP

- A. Installation areas must be kept free from traffic and other trades during the application procedure and cure time.
- B. Protect finished surfaces of coating system from damage during construction.
- C. Touch-up, repair or replace damaged flooring system after substantial completion.
- D. Clean area and remove all debris upon completion of work. Dispose of empty containers properly according to current local, state and federal regulations.
- E. Protect cementitious coating from damage with appropriate covering, until 72 hours after completion of installation.
- F. Protect coatings as needed to prevent damage.

3.6 MAINTENANCE

- A. Contractor shall provide to owner, maintenance and cleaning instructions for the cementitious coating system upon completion of work. Owner is required to clean and maintain the surfaces to maintain manufacturer's warranty.

END OF SECTION

This guide specification has been prepared by Westcoat Specialty Coating Systems to assist design professionals in developing a project specific specification. This guide is a template that must be reviewed and adapted by specifiers to comply with project requirements. This guide specification is not to be copied directly into a project specification manual without review.



APPLIED ON CONCRETE



Burnt Orange | 551



Brown | 552



Red Brown | 566



Yellow | 550



Green | 557



Sage Green | 568



Royal Blue | 567



Blue | 556



Purple | 554



Red | 558



Gray | 563



Black | 553



CAUTION:

Color will vary between products and sheens. This chart is for reference only.
Please request an actual color sample or apply sample on site before beginning any project.

