

**CA-29 Mini Safe Grip**

**Description**

CA-29 Mini Safe Grip is a Non-Skid Additive that can be added to sealers or topcoats to produce a skid resistant surface to help reduce slip hazards. This lightweight product will remain suspended in most coatings and leaves a less aggressive texture than CA-30 or CA-31.

**Uses**

CA-29 can be added to many Westcoat products, but is specifically designed to be used with thin film forming sealers and topcoats, such as: EC-11, EC-32, EC-34, EC-95G, EC-95F, EC-101, EC-102, SC-10, SC-42, SC-65, SC-70 and SC-71.

**Advantages**

Increases Slip Resistance • Stays Suspended in Thin Materials • Easy to Use • Works in Clear and Pigmented Coatings

Product Data			
<b>Packaging</b>	32 ounce bottle	<b>Colors</b>	White, but dries Clear
<b>Coverages</b>	N/A	<b>Mix Ratio</b>	Up to 32 ounces by volume per 5 gallons of: SC-10, SC-42, SC-70 or SC-71 Up to 32 ounces by volume per 3 gallons of: EC-11, EC-32, EC-34, EC-95G, EC-95F, EC-101, EC-102 or SC-65
<b>VOC Content</b>	0 gm/l	<b>Shelf Life</b>	Indefinite in unopened packaging

**Inspection**

Surface must be prepared in the proper manner that is required in the System Specification sheet for the desired application.


**Preparation**

Refer to appropriate System Specification sheet prior to installation.

**Mixing**

Mix up to 1 quart (32 ounces by volume) per 5 gallons of SC-10, SC-42, SC-70 or SC-71. Mix up to 1 quart (32 ounces by volume) per 3 gallons of EC-11, EC-32, EC-34, EC-95G, EC-95F, EC-101, EC-102 or SC-65. This will leave a consistent texture that is still fairly easy to clean. The actual skid resistance will be greatly affected by the existing texture of the surface you are covering and the thickness of the coating applied. Do not exceed these amounts without consulting Westcoat. CA-29 may affect the overall gloss or sheen. It is recommended to prepare a mock up prior to application.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

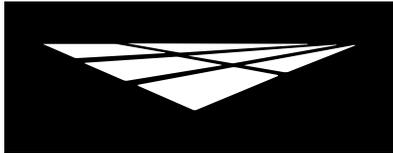

**westcoat**<sup>®</sup>  
SPECIALTY COATING SYSTEMS

**PRODUCT  
SPECIFICATION**

**CA**

**ACCESSORIES**  
ADDITIVES & ACCESSORIES

## **CA-29 Mini Safe Grip**

### **Coverage**

For more information on coverage, please refer to the appropriate System Specification sheet.

### **Application**

For more information on application, please refer to the appropriate System Specification sheet.

### **Dry Time**

For more information on dry times, please refer to the appropriate System Specification sheet.

### **Clean Up**

Uncured material can be removed with an environmentally-safe solvent. If cured, material can only be removed mechanically.

### **Limitations**

- This product is designed for professional use only.
- Do not apply in temperatures below 55°F or above 95°F.
- Not intended for use with any Non-Westcoat brands.
- Not designed to be broadcast.
- CA-29 may alter the gloss or sheen on the topcoat or sealer.
- It is strongly suggested that all limitations and attributes are disclosed to customer and end user.
- Westcoat takes no responsibility for slippery surfaces. The applicator and the customer determine the texture. If additional skid resistance is required, please contact Westcoat for recommendations.
- Do not use more CA-29 than recommended.
- Do not allow any Westcoat products to freeze.

### **Health Precautions**

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

### **Slip Precaution**

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102  
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2  
CA-29 6/20