**westcoat®****PRODUCT
SPECIFICATION****WP****WATERPROOF**
RELIABLE MOISTURE BARRIERS**WP-49 Mer-Ko® Slip Sheet****Description**

Westcoat WP-49 Mer-Ko® Slip Sheet is a heavyweight fibrous glass mat, bound together with a resinous binder and coated with weathering grade asphalt modified with SBS (Styrene Butadiene Styrene). The reinforcing glass mat consists of glass fibers that are uniformly distributed and aligned to impart strength in all directions while displaying excellent dimensional stability throughout. The superior properties of WP-49 allow it to outperform traditional organic underlayments in all important measurements including tensile strength, cold temperature flexibility, grab breaking strength, penetration, and tear resistance.

Uses

WP-49 is designed to be used as the slip sheet material for the Mer-Ko® System.

Advantages

Modified Bitumen-Lays Flat, Won't Buckle • Excellent Low Temperature Flexibility • Glass Based and Non-Porous • Will Not Rot or Deteriorate • Hot or Cold Applications

Product Data			
Packaging	318 ft² Rolls (36" x 106')	Color	Black
Coverages	~318 ft² Varies depending on use and application	Mix Ratio	n/a
VOC Content	0 gm/l	Shelf Life	Indefinite when properly stored
Certification	ASTM D4601, Type II		

Inspection

Surface must be structurally sound, dry, and free of laitance, oil, grease, curing agents, dirt, dust or other foreign material that may prevent proper adhesion.

Preparation

Please refer to the Mer-Ko System Specification Sheet for further information regarding Surface Preparation. Surface should be prepared per industry standard.

Application

Please refer to the Mer-Ko System Specification Sheet for further information regarding Application.

Storage & Handling


Store all materials off the ground, in a dry environment, at temperatures between 50°F and 90°F and not in direct sunlight. Do Not double Stack WP-49. All materials should be stored in compliance with local fire and safety requirements. Always wear proper safety equipment, including particle mask, eye protection and gloves when mixing and/or applying these products.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

**westcoat®**

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

1 of 2
WP-49 7/25

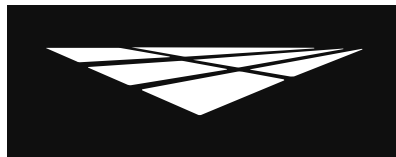

westcoat®

**PRODUCT
SPECIFICATION**

WP

WATERPROOF
RELIABLE MOISTURE BARRIERS

WP-49 Mer-Ko® Slip Sheet

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Wear rubber gloves and eye protection. Avoid eye contact and prolonged contact with skin. Wash thoroughly after handling. If eye contact occurs, flush with water for 15 minutes. Call a physician immediately.

Limitations

- The substrate surface must be structurally sound, clean, dry and free of laitance, dirt, dust, oil, grease, paint or other contaminants at the time of material application.
- Substrate and ambient temperature must be above 55°F and below 90°F during and for 24 hours following the application.
- Do not apply in inclement weather or when rain is occurring or expected within 24 hours.
- For Professional Use Only

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat®

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2
WP-49 7/25