



Description

Westcoat WP-48 Tri-Directional Fiberlath is a balanced, open-grid, triaxial glass fiber mesh that distributes stress across three directions.

Uses

WP-48 is used to reinforce the WP-95 Flashing Membrane in the Mer-Ko, Shur Deck Pro Systems and Shur Deck Over Concrete Systems.

Advantages

High Tensile Strength • Excellent Dimensional Stability • Increased Tear Resistance
Tough and Durable • Easy to Handle and Install • Non-Adhesive

Product Data			
Packaging	4 rolls per box (425 ft ² Rolls (34" x 150'))	Color	White
Coverages	425 ft ² Varies depending on use and application	Mix Ratio	n/a
VOC Content	0 gm/l	Shelf Life	5 years when properly stored

Inspection

Surface must be structurally sound, dry, and free of laitance, oil, grease, curing agents, dirt, dust or other foreign material that may prevent proper adhesion.

Preparation

Please refer to the desired System Specification Sheet for further information regarding Surface Preparation. Surface should be prepared per industry standard.

Application

Please refer to the desired System Specification Sheet for further information regarding Application.

Storage & Handling


Store all materials off the ground, in a dry environment, at temperatures between 50°F and 90°F and not in direct sunlight. All materials should be stored in compliance with local fire and safety requirements. Always wear proper safety equipment, including particle mask, eye protection and gloves when mixing and/or applying these products.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

1 of 2
WP-48 8/26

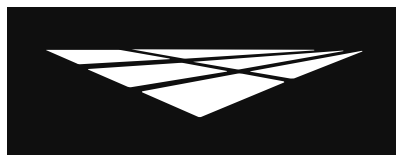

westcoat®

PRODUCT SPECIFICATION

WP

WATERPROOF
RELIABLE MOISTURE BARRIERS

WP-48 Tri-Directional Fiberlath

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Wear rubber gloves and eye protection. Avoid eye contact and prolonged contact with skin. Wash thoroughly after handling. If eye contact occurs, flush with water for 15 minutes. Call a physician immediately.

Limitations

- The substrate surface must be structurally sound, clean, dry and free of laitance, dirt, dust, oil, grease, paint or other contaminants at the time of material application.
- Substrate and ambient temperature must be above 55°F and below 90°F during and for 24 hours following the application.
- Do not apply in inclement weather or when rain is occurring or expected within 24 hours.
- For Professional Use Only
- Not intended for use as a finished surface.
- Avoid exposing to sharp objects that could cut or puncture the material.

Technical Data

Property	WP-48 Tri-Directional Fiberlath
Size	34" width x 150 linear feet
Adhesive	No
Color	White
Pattern	Tri-Directional
Weight	2.95 (oz/yd ²)
MD Yarn (Greige & Tri-directional)	150 1/0 Fiberglass
CD Yarn (Greige & Tri-directional)	75 1/0 Fiberglass
Stitch Yarn	40 Denier Polyester
Greige Pattern	9 x 8.0 yarns/in
Tri-directional Yarn Pattern	2 x 6 yarns/in
Tensile Strength	50 x 105 lb/in
Coating	SBR Latex
Shelf Life	5 years

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat®

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2
WP-48 8/26