



ER 587



## ABOUT ALX

Experience unmatched strength, durability, and design with ALX™, Westcoat's waterproof deck coating system. Formulated for plywood surfaces, the ALX system integrates acrylic resins and cement blends into a reinforced, galvanized metal lath. Transform a wood subfloor to a decorative concrete or epoxy finish with ALX Underlayment system - a blank slate for installing tile, epoxy or other decorative flooring options.



## REBUFFS RAIN, SNOW + SPILLS.

- Extensive Testing and Certifications
- Provides Early Protection After Framing
- Low Maintenance
- Unlimited Decorative Options
- Cost Effective
- Exterior or Interior
- Solar Reflective Option is CRRC approved.



**FOR PROFESSIONAL USE ONLY.**





**IAPMO ER-587 • Class A and One Hour Fire Rated • City of LA Approval  
Meets Wildland Urban Interface (W.U.I) Requirements**

### THE SYSTEM

Westcoat ALX is a waterproof walking deck system that is reinforced with metal lath and installed with a series of three separate polymer-modified cementitious applications and sealed with Westcoat's SC-10 Acrylic Topcoat or clear sealer. The finished system weighs approximately 2½ lbs per square foot and is less than a 1/4" thick. ALX gives plywood the look and feel of concrete with a decorative appeal. This system can be installed with a custom finish for exterior or interior. ALX Interior transforms a plywood subfloor into a concrete like finish.

ALX with full Sheet Membrane and Custom Finish



Sheet Membrane    Lath    Base Coat    Slurry Coat    Grout Coat    Custom Finish

### PRO

What sets this version of the bonded system apart from our traditional ALX is an added layer of fiberlath reinforced membrane which guards against cracking on larger spans of unreinforced substrates. Like the ALX system, Pro can be installed with a standard or custom finish. Available with up to a 20 Year Warranty when installed per spec by a Westcoat qualified applicator.

ALX PRO Standard Finish




Sheet Membrane w/ Metal Lath    Base Coat    Fiberlath w/ Resin Membrane    Slurry Coat    Texture Coat    Topcoat

### WATERPROOFING UNDERLAYMENT

This process is for waterproofing plywood decks to receive tile, stone, or concrete as the finished look. Protect your plywood right after framing and allow for other trades to "traffic" during the construction process.

ALX UNDERLAYMENT

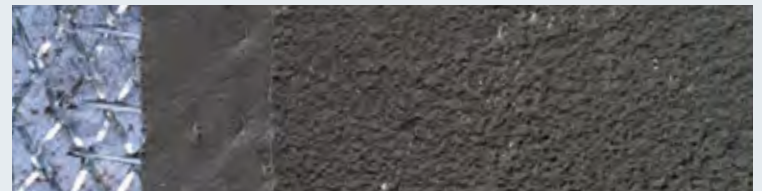

Sheet Membrane w/ Metal Lath    Base Coat    Slurry Coat



**HAVE A QUESTION? GET IN TOUCH:**

**westcoat.com / 800.250.4519 / info@westcoat.com**

4007 Lockridge Street, San Diego, CA 92102, USA.