



**westcoat**  
SPECIALTY COATING SYSTEMS

# ALX

Experience unmatched strength, durability, and design with ALX, Westcoat's waterproof deck coating system. Formulated for plywood surfaces, the ALX system integrates the finest acrylic resins and cement blends into a reinforced, galvanized metal lath. ALX eliminates plywood seams and is ideal for use in heavy traffic areas. ALX Pro calls for an added fiberlath reinforced membrane. ALX Interior option provides a solution for transforming a wood subfloor to a decorative concrete or epoxy finish. ALX Under Tile system provides a blank slate for installing tile as it waterproofs your exterior deck over living space.



**WATERPROOF**  
RELIABLE MOISTURE BARRIERS

**westcoat**

**Rebuffs rain, snow, and spills.**

Developed for plywood and concrete surfaces, our Waterproof Coat product line was created by some of the most experienced technicians in the industry and features the highest quality components for complete waterproof protection.

**westcoat**  
SPECIALTY COATING SYSTEMS

4007 Lockridge Street San Diego, CA 92102  
800•250•4519 • info@westcoat.com • westcoat.com

FOR PROFESSIONAL USE ONLY



**westcoat.**  
SPECIALTY COATING SYSTEMS

# F O R P R O F E S S I O N A L U S E O N L Y

## ALX in Standard and Custom Finish

Westcoat ALX is a waterproof walking deck system. Reinforced with metal lath and installed with a series of three separate polymer-modified cementitious applications, then sealed with Westcoat's SC-10 Acrylic Topcoat or a clear sealer. The finished product weighs approximately 2½ lbs per square foot. This system gives plywood the look and feel of concrete with a decorative appeal. This system can be installed with a custom finish for exterior or interior. ALX Interior transforms a plywood subfloor into a concrete like finish.

## ALX Testing

- Class A Fire Rating
- 1 hour Fire Test over 5/8" plywood substrate - ASTM E119
- ICC ESR 2201
- City of LA Approval RR 25986

## ALX PRO in Standard and Custom Finish

What sets this bonded system apart from our traditional ALX is an added layer of fiberlath reinforced membrane which guards against cracking on larger spans of unreinforced substrates. Like the ALX system, Pro can be installed with a standard or custom finish.

## ALX Under Tile

This process is for waterproofing plywood decks to receive tile, stone, or concrete as the finished look. Waterproof your plywood right after framing and allow for other trades to "traffic" during the construction process.

## ALX with full Sheet Membrane and Custom Finish




Sheet Membrane Lath Base Coat Slurry Coat Grout Coat Custom Finish

## ALX Advantages

- Provides early protection after framing
- Mitigates plywood seam movement
- Environmentally-friendly process
- May contribute to LEED credits
- Exterior or interior

## ALX PRO Standard Finish

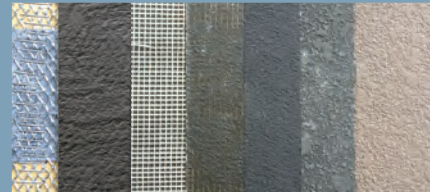

Sheet Membrane w/ Metal Lath Base Coat Fiberlath w/ Resin Membrane Slurry Coat Texture Coat Topcoat

## ALX UT



Sheet Membrane w/ Metal Lath Base Coat Slurry Coat



**westcoat.**  
SPECIALTY COATING SYSTEMS

4007 Lockridge Street San Diego, CA 92102  
800-250-4519 • info@westcoat.com • westcoat.com

F O R P R O F E S S I O N A L U S E O N L Y